




Power Block

Part Number 10960: Power Block 50A



**RISK OF
ELECTRIC
SHOCK**

- For Use by Qualified Personnel Only.
- The routing of portable supply conductors, the making and breaking of supply connectors, and the energization and de-energization of supply services shall be performed by qualified personnel only.
- Suitable for use in damp locations.
- Do not overload or exceed the rated capacity of the device(s).
- Use only for 125/250 single-phase circuits.
- Three pole 4-wire grounding.
- Suitable for continuous use at full rated output.
- Do Not Operate if Damaged.

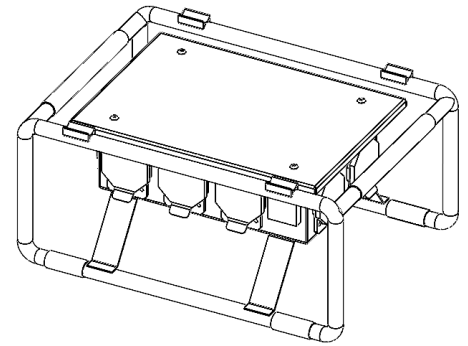

INSTALLATION & OPERATION

1. Remove from box and inspect for damage.
2. Place unit on flat, level surface. If stacking units, stack no more than three units high. Use wire-ties or clamps to hold the unit in place. Unit may also be wall or ceiling mounted using the tubular cage for support.
3. Verify all circuit breakers are reset and on.
4. Connect the power supply cable to the 50A Inlet.
5. Verify that devices are powered and operating correctly.
6. A second box may be connected using the 50A Outlet. Note: When connecting 2 or more boxes, please keep total cord length within NEC requirements. In most cases, no more than 150ft of total cord length should be used.
7. Place unit on flat, level surface. If stacking units, stack no more than three units high. Use wire-ties or clamps to hold the unit in place. Unit may also be wall or ceiling mounted using the tubular cage for support.
8. Verify all circuit breakers are reset and on.
9. Connect the power supply cable to the 50A Inlet.
10. Verify that devices are powered and operating correctly.
11. A second box may be connected using the 50A Outlet. Note: When connecting 2 or more boxes, please keep total cord length within NEC requirements. In most cases, no more than 150ft of total cord length should be used.

MAINTENANCE

- Keep unit clean.
- Ensure that outlet covers are closing properly.
- Test GFCI outlets to ensure proper operation.
- Verify circuit breakers are operating properly.
- Replace circuit breakers with same size and rating only. Use only Siemens QP breaker or equivalent.

WARRANTY

- 1-year limited warranty.

SPECIFICATIONS

Mechanical

- 16-gauge steel construction with paint finish
- 26 x 17 x 13 in. [64.8 x 43.2 x 33.0 cm]
- 42 lb. [19 kg]

Electrical

- 125/250VAC, 60 Hz, 50A Input / 50A Output
- USB Type A & Type C – 2A Power Port
- 50A Inlet – CS6375
- 50A Outlet – CS6369
- 30A Protected Outlet – NEMA L6-30
- 30A 2-Pole Breaker
- (6) 20A Protected GFCI Outlets – NEMA 5-20
- (6) 20A 1-Pole Breakers

Environmental

- -20 to 104F [-20 to 40C]

Safety

- NEMA Type 3R
- cETLus Listed – UL 1640
- Complies with OSHA standards.



800.336.1976

sales@engproducts.com

engproducts.com

5401 Smetana Drive, Minnetonka, MN 55343