


ORDERING EXAMPLE — LED LUMINAIRE SERIES

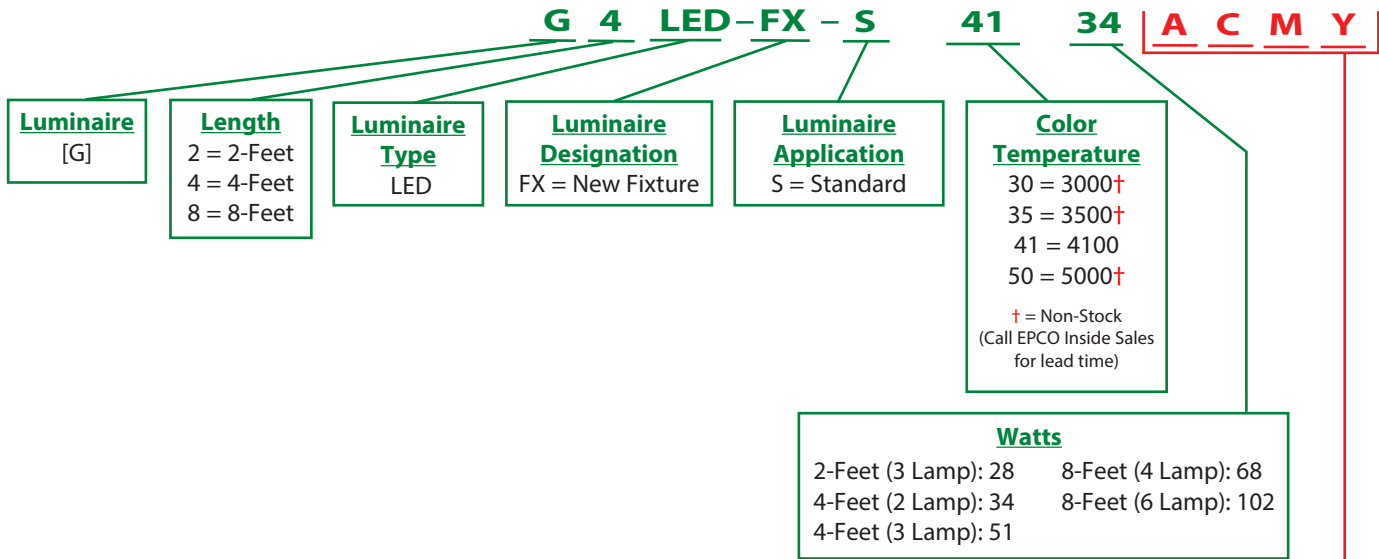

LED Luminaire Series Options	
The Standard LED Luminaire can be built to your specifications by adding options as "part" of your part number.	
Option	Notes
A. 6-Foot Power Cord (PSS6)	Straight Plug, 13 AMP
A1. 6-Foot Twist Lock Power Cord	L5-15P, 120V
A2. 6-Foot Twist Lock Power Cord	L7-15P, 277V
C. Acetal (Plastic) Latches	<i>Not</i> recommended for the following applications: Swimming Pools because of the chlorine; Car Washes because of the chemicals used; Food Processing because of the cleaning chemicals; Agriculture because of the ammonia gas.
E. Emergency LED Backup Driver	Non-Stock — Call EPCO Inside Sales for lead time
F. One (1) 1/2" Water Resistant Hub	Required for Pendant Mounting a 2-foot or 4-foot luminaire.
G. Two (2) 1/2" Water Resistant Hubs	Required for Pendant Mounting an 8-foot luminaire.
H. One (1) 3/4" Water Resistant Hub	Required for Pendant Mounting a 2-foot or 4-foot luminaire.
M. Ceiling and Wall Mount Mounting Hardware	Powder Coated, Standard (Not NSF approved for food service applications)
M1. Ceiling and Wall Mount Mounting Hardware	Stainless Steel (National Sanitation Foundation approved)
M2. Wall Mount Stainless Steel Mounting Hardware	45° Angle (National Sanitation Foundation approved)
P. Clear Ribbed Diffuser	
P1. Frosted Ribbed Diffuser	
R1. PIR Occupancy Sensor (for dry locations) R2. PIR Occupancy Sensor (for dry locations/cold locations) R3. PIR Occupancy Sensor (for wet locations) R4. Microwave Occupancy Sensor (On/Off Only) R5. Microwave Occupancy Sensor (0-10V Dimming 30%) R6. Microwave Occupancy Sensor (0-10V Dimming 50%)	Two Occupancy Sensors are available: A. High/Medium Bay Passive Infrared (PIR) Occupancy Sensors: Recommended for ceiling heights 15-feet or higher. PIR sensors function as an automatic lighting control in high and medium bay applications. B. Microwave Sensors: Recommended for ceiling heights 15-feet or lower. The microwave sensor detects the slightest movement in the occupancy zone. Detection is sensed through doors, glass, or thin walls.
S. Stainless Steel Latches	
Y. Surface Mount Bracket	EPCO will pre-drill a hole in the luminaire housing to facilitate pulling the supply conductors from the junction box and into the luminaire housing.
Z. Bulk Packaging	25 or 50 per skid (eliminates individual carton packaging on the job site). When entering Bulk Packaging orders, do not include Mounting Hardware or Tamper Resistant Screws in your part number.