



ENGINEERED PRODUCTS CO.

5401 Smetana Drive • Minnetonka, MN 55343

Phone: 952.767.8780 / 800.336.1976 • Fax: 952.767.8786 / 800.336.2801

Web Site: engproducts.com

LIGHTING PRODUCTS

Product • Data • Sheet




UTILITY LIGHTING



- High impact, corrosion resistant incandescent fixtures are UL Listed for use in wet or damp locations.
- Non-metallic, phenolic junction boxes retain their shape under severe environmental conditions such as heat, cold, ammonia, and humidity.
- All globes are UV resistant to protect against discoloration. Globe options: Glass, Tempered Glass, Acrylic Prismatic, and Clear Polycarbonate.
- The tough construction of Utility Light globes withstands severe impact and cleaning by high powered pressure washers.
- Resilient water resistant gaskets provide a tight, long lasting seal that will not dry out or disintegrate.
- Strong, stainless steel hardware resists corrosion.

Ceiling Mount Lighting Fixtures

- UL Listed File Number: E182610.
- Suitable for use in damp locations.
- High impact, corrosion resistant, compression molded phenolic junction box and fixture base.
- All Incandescent Ceiling Mount Fixtures are supplied with a cork mounting gasket and stainless steel screws. Wired with 90°C minimum supply wires (THHN).
- Ideal for Hog and Poultry Confinement Buildings. Typical applications include walk-in refrigerators, elevator shafts, tunnels, and more.

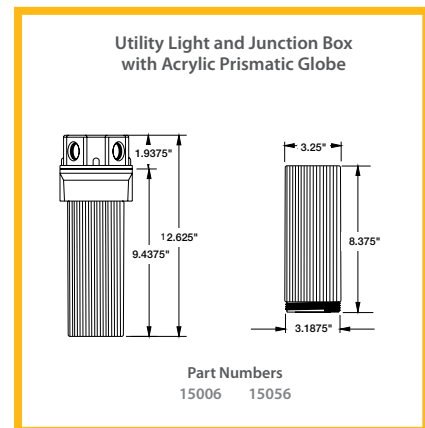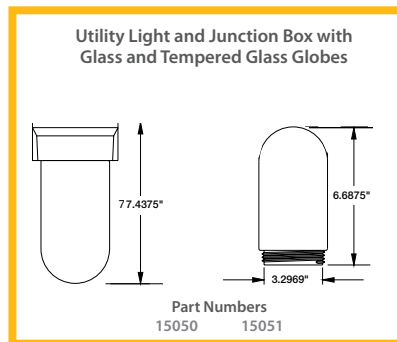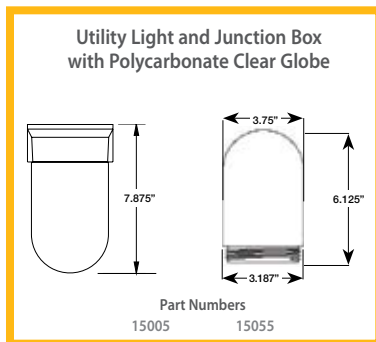


Catalog Number	UPC Number	Description	Standard Package	Master Carton	Master Carton Ship Wt. (lbs.)
With 12 Cubic Inch Junction Box P/N 15045					
15000	15000	Utility Light and Junction Box with Glass Globe, Rated for 150 Watt Bulb, maximum.	1/Carton	12/Carton	24
15001	15001	Utility Light and Junction Box with Tempered Glass Globe, Rated for 150 Watt Bulb, maximum.	1/Carton	12/Carton	24
15005	15005	Utility Light and Junction Box with Polycarbonate Clear Globe, Rated for 60 Watt Bulb, maximum.	1/Carton	12/Carton	18
15006	15006	Utility Light and Junction Box with Acrylic Prismatic Globe, Rated for 60 Watt Bulb, maximum.	1/Carton	12/Carton	19
Without Junction Box					
15050	15050	Utility Light with Glass Globe, Rated for 150 Watt Bulb, maximum.	1/Carton	12/Carton	20
15051	15051	Utility Light with Tempered Glass Globe, Rated for 150 Watt bulb, maximum.	1/Carton	12/Carton	20
15055	15055	Utility Light with Clear Polycarbonate Globe Rated for 60 Watt Bulb, maximum	1/Carton	12/Carton	14
15056	15056	Utility Lights with Acrylic Prismatic Globe, Rated for 60 Watt Bulb, maximum.	1/Carton	12/Carton	15
15090	15090	Incandescent Fixture Base, without Globe.	1/Carton	12/Carton	7

Wall Mount Lighting Fixtures



White Fixture with Acrylic Prismatic Globe

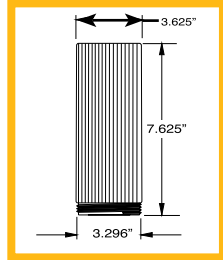


Acrylic Prismatic Globe (Tall)



23 Watt Spiral Fluorescent Lamp



Black Fixture with Tempered Glass Globe

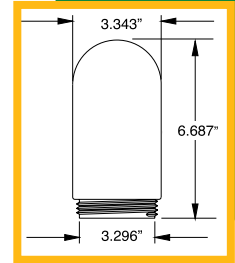

Tempered Glass Globe

- UL File Number: E1 82610, Volume 2.
- Incandescent Fixture rated up to 150 watts.*
- High impact, corrosion resistant construction.
- Medium Base - fits 3.25" or 4" Outlet Box.**
- Globe options: Tempered Glass or Acrylic Prismatic.
- UL Listed for use in wet locations.
- Low cost alternative to Vapor Tight Light Fixtures.
- Nickel-plated Brass Screw Shell.
- UV resistant - Will not fade or discolor.

* When used with Tempered Glass Globe.

** Use the optional universal mounting bracket for residential junction box applications.

Catalog Number	UPC Number	Description	Standard Package	Master Carton	Master Carton Ship Wt. (lbs.)
15600	15600	Wall Mount Utility Light - Black, with Tempered Glass Globe	1/ Carton	12/ Carton	22
15605	15605	Wall Mount Utility Light - Black, with Tempered Glass Globe Includes 12 Cubic Inch Junction Box with Combination .5" and .75" Knockouts	1/ Carton	12/ Carton	28
15610	15610	Wall Mount Utility Light - Black, with Acrylic Prismatic Globe	1/ Carton	12/ Carton	16
15615	15615	Wall Mount Utility Light - Black, with Acrylic Prismatic Globe. Includes 12 Cubic Inch Junction Box with Combination .5" and .75" Knockouts	1/ Carton	12/ Carton	22
15620	15620	Wall Mount Utility Light - White, with Tempered Glass Globe	1/ Carton	12/ Carton	22
15625	15625	Wall Mount Utility Light - White, with Tempered Glass Globe, Includes 12 Cubic Inch Junction Box with Combination .5" and .75" Knockouts	1/ Carton	12/ Carton	28
15630	15630	Wall Mount Utility Light - White, with Acrylic Prismatic Globe	1/ Carton	12/ Carton	16
15635	15635	Wall Mount Utility Light - White, with Acrylic Prismatic Globe, Includes 12 Cubic Inch Junction Box with Combination .5" and .75" Knockouts	1/ Carton	12/ Carton	22
15690	15690	Universal Mounting Bracket	1/ Pkg	50/ Pkg	1
Fluorescent Lamp					
15680	15680	23 Watt Cool White 5000K Compact Fluorescent Lamp	1/ Pkg	50/ Pkg	8

Wire Guard



- Fits Glass, Tempered Glass and Acrylic Prismatic (short) Globes only.
- 8 AWG steel, with a three-coat electrolytic plating.
- Clamp-type attachment with a 10-24 hex head screw.

Note: The Wire Guard only fits part numbers 15000, 15001, 15005, 15006, 15050, 15051, 15055 and 15056.

Catalog Number	UPC Number	Description	Standard Package	Master Carton	Master Carton Ship Wt. (lbs.)
15063	15063	Wire Guard	1/ Pkg	n/a	6

Lampholders



Part Number: 16500



Part Number: 16502



Part Number: 16510



Part Number: 16512



Part Number: 16514



Part Number: 16520



Part Number: 16522



Part Number: 16524



Part Number: 16526



Part Number: 16100



Part Number: 16501



Lampholder (P/N 16512) with Metal Safety Cage (P/N 16501)

- UL Listed File Number: E236781.
- Nickel-Plated Brass Screw Shell.
- UV resistant phenolic Lampholders will not fade or discolor.
- Optional Plastic and Metal Safety Cages fit all Lampholders.
- Includes corrosion resistant stainless steel mounting screws.
- For Commercial, Industrial, Residential and Agricultural Lighting Applications.
- Medium Base fits 3.25" or 4.0" Outlet Box.

Catalog Number	UPC Number	Description	Standard Package	Master Carton	Master Carton Ship Wt. (lbs.)
16500	16500	Keyless Porcelain Incandescent Lampholder, 4-terminal	1/Pkg	48/Carton	33
16502	16502	Porcelain Incandescent Lampholder, 4-terminal with Pull Chain	1/Pkg	48/Carton	35
16510	16510	Keyless Phenolic Incandescent Lampholder, 4-terminal	1/Pkg	48/Carton	11
16512	16512	Phenolic Incandescent Lampholder, 4-terminal with Pull Chain	1/Pkg	48/Carton	13
16514*	16514	Porcelain Incandescent Lampholder with Pull Chain and 15 Amp Receptacle	1/Pkg	48/Carton	40
16520	16520	Keyless Porcelain Incandescent Lampholder with 7" Black and White Conductors	1/Pkg	48/Carton	36
16522	16522	Porcelain Incandescent Lampholder with Pull Chain and 7" Black and White Conductors	1/Pkg	48/Carton	37
16524	16524	Keyless Phenolic Incandescent Lampholder, 4-terminal, with 7" Black and White Conductors	1/Pkg	48/Carton	11
16526	16526	Phenolic Incandescent Lampholder, with Pull Chain and 7" Black and White Conductors	1/Pkg	48/Carton	13
16100	16100	Safety Cage - Plastic	10/Carton	n/a	2
16501	16501	Safety Cage - Metal	12/Carton	n/a	6

* Note: Aluminum Screw Shell.

Standard Non-Metallic Junction Boxes

- UL Listed. File Number: E182992.
- Corrosion resistant.
- Suitable for use in wet or damp locations.
- High impact, compression molded phenolic plastic rated to 150°C.



12 Cubic Inch



19 Cubic Inch



Round Junction Box
Cover and Gasket



16 Cubic Inch



Single-Gang Junction
Box Cover and Gasket

Catalog Number	UPC Number	Description	Standard Package	Master Carton	Master Carton Ship Wt. (lbs.)
Standard Junction Boxes					
15045	15045	12 Cubic Inch Box - .5" and .75" Knockouts Combo	1/Carton	12/Carton	6
15046	15046	12 Cubic Inch Junction Box - .5" Knockouts	1/Carton	12/Carton	6
15047	15047	12 Cubic Inch Junction Box - .75" Knockouts	1/Carton	12/Carton	6
15049	15049	19 Cubic Inch Junction Box - .75" Knockouts	1/Carton	12/Carton	8
15070	15070	16 Cubic Inch Single-Gang FS Type Junction Box - .5" Knockouts	1/Carton	12/Carton	6
15071	15071	16 Cubic Inch Single-Gang FS Type Junction Box - .75" Knockouts	1/Carton	12/Carton	6
15075	15075	Single-Gang Junction Box Cover with Gasket	1/Carton	12/Carton	2
15690	15690	Universal Mounting Bracket	1/Pkg	12/Pkg	1
15905	15905	Round Junction Box Cover and Gasket	1/Pkg	12/Pkg	2

SPIDERBOX™ Non-Metallic Junction Boxes

- UL Listed. File Number: E182992.
- Suitable for use in wet or damp locations.
- Corrosion resistant.
- Easy to install using the eight (8) mounting brackets that are in-line with knockouts. Eliminates a 2 x 4 stub-in.
- High impact compression molded phenolic plastic rated to 150°C.



Catalog Number	UPC Number	Description	Standard Package	Master Carton	Master Carton Ship Wt. (lbs.)
15246	15246	12 Cubic Inch SPIDERBOX Junction Box - .5" Knockouts	1/Carton	12/Carton	6
15247	15247	12 Cubic Inch SPIDERBOX Junction Box - .75" Knockouts	1/Carton	12/Carton	6
15905	15905	Round Junction Box Cover and Gasket	1/Pkg	12/Pkg	2


Fixture Globes

Glass and Tempered-Glass Globes

- Withstands extreme temperature changes.
- 150 Watt incandescent bulb, maximum.

Acrylic Prismatic and Polycarbonate Globes

- UV stabilized material. Resist discoloration four times longer than polycarbonate.
- 60 Watt incandescent bulb, maximum.
- Acrylic Prismatic features internal ribbing and smooth exterior.
- 3 year guarantee against discoloration from UV exposure.

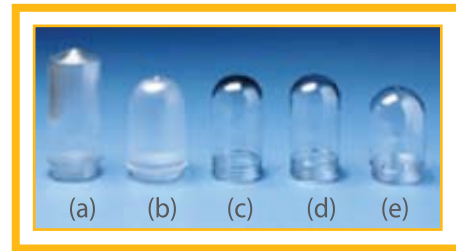

- (a) Acrylic Prismatic (Tall)
- (b) Acrylic Prismatic
- (c) Glass
- (d) Tempered Glass
- (e) Polycarbonate Clear

Catalog Number	UPC Number	Description	Standard Package	Master Carton	Master Carton Ship Wt. (lbs.)
15025	15025	Acrylic Prismatic Globe (Tall)	1/Pkg	12/Carton	5
15401	15401	Acrylic Prismatic Globe	1/Pkg	12/Carton	5
15015	15015	Glass Globe	n/a	32/Carton	34
15016	15016	Tempered-Glass Globe	n/a	32/Carton	34
15020	15020	Polycarbonate Clear Globe	1/Pkg	12/Carton	5

Non-Metallic UF Connectors

- Compression type specifically designed for use with 12 or 14 AWG Romex cable.




Catalog Number	UPC Number	Description	Standard Package	Standard Package Ship Wt. (lbs.)
15035	15035	Non-Metallic UF Connector .5", accommodates 14/2 and 12/2	12/Pkg	1
15040	15040	Non-Metallic UF Connector .75", accommodates 14/3 and 12/3	12/Pkg	1

Replacement Socket

- High temperature porcelain socket housing with 6" 18 AWG stranded wire leads.
- Nickel-plated brass screw shell.
- 150 Watt incandescent bulb, maximum.

Note: Porcelain sockets are not interchangeable with fixtures built with phenolic sockets.

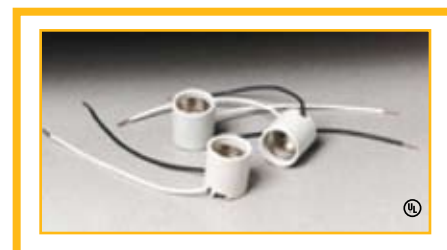

Catalog Number	UPC Number	Description	Standard Package	Standard Package Ship Wt. (lbs.)
15031	15031	Replacement Socket - Porcelain	12/Pkg	1

NOTES



Distributed By:

A large empty rectangular box with a green border, intended for a distributor's name and contact information.