



ENGINEERED PRODUCTS CO.

5401 Smetana Drive • Minnetonka, MN 55343
 Phone: 952.767.8780 / 800.336.1976 • Fax: 952.767.8786 / 800.336.2801

Visit our Web Site at engproducts.com

RESIDENTIAL ACCESSORIES

RESIDENTIAL ACCESSORIES

Product Data Sheet

Air Conditioner Whips

- UL Listed. File Number: E87199.
- Labor and Time Savings! Cost effective non-metallic AC Whips save the electrical contractor time and money.
- Reducing washers included.
- Convenient packaging of 10 or 20 AC Whips per carton.



Designed to save the contractor installation time and labor, EPCO Air Conditioner Whips are typically used to connect the central air conditioner compressors to the disconnect box.

The standard Air Conditioner Whip includes one straight, one 90° connector, and two reducing washers.


A number of liquid tight connectors are available for any application including snap-in, 45°, straight and 90°. Three conductors are included in 1/2" or 3/4" non-metallic liquid tight conduit using either 8 AWG or 10 AWG THHN conductors.

EPCO will also build "Custom" Air Conditioner Whips to your specifications in any length using Type LFNC-B non-metallic conduit, PVC or die cast connectors, and various wire gauges and colors. Contact EPCO Inside Sales for more specific information.

Catalog Number	UPC Number	Description	Standard Package	Standard Package Ship Wt. (Lb.)
ACWNM1043-IRA	11202	4-Foot: 1/2" Non-Metallic, One Straight and One Right Angle Connector, Three 10 AWG Stranded Red, Black, and Green	20/Carton	47
ACWNM1063-IRA	11204	6-Foot: 1/2" Non-Metallic, One Straight and One Right Angle Connector, Three 10 AWG Stranded Red, Black, and Green	20/Carton	49
ACWNM843-IRA	11205	4-Foot: 3/4" Non-Metallic, One Straight and One Right Angle Connector, Two 8 AWG Stranded Red and Black and One 10 AWG Stranded Green Ground Wire	20/Carton	49
ACWNM863-IRA	11208	6-Foot: 3/4" Non-Metallic, One Straight and One Right Angle Connector, Two 8 AWG Stranded Red and Black and One 10 AWG Stranded Green Ground Wire	20/Carton	36
ACWNM843-IRA-1/2	11214	4-Foot: 1/2" Non-Metallic, One Straight and One Right Angle Connector, Two 8 AWG Stranded Red and Black and One 10 AWG Stranded Green Ground Wire	20/Carton	49
ACWNM863-IRA-1/2	11213	6-Foot: 1/2" Non-Metallic, One Straight and One Right Angle Connector, Two 8 AWG Stranded Red and Black and One 10 AWG Stranded Green Ground Wire	20/Carton	50

Air Conditioner Whips...continued

AC Whip Connector Reference Guide

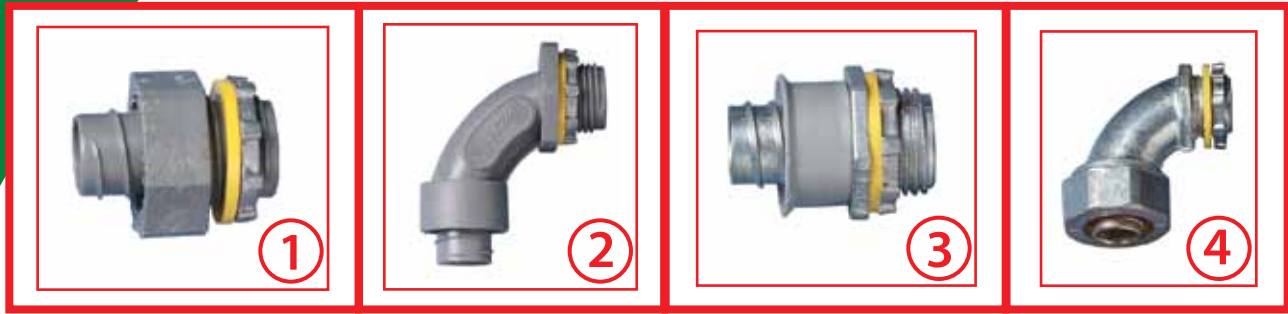

Type: Straight, Screw-in
Material: Liquid Tight PVC
Specify Size:
 1/2": P/N E00-045-000
 3/4": P/N E00-043-000

Type: 90°, Screw-in
Material: Liquid Tight PVC
Specify Size:
 1/2": P/N E00-044-000
 3/4": P/N E00-046-000

Type: Straight, Screw-in
Material: Die Cast
Specify Size:
 1/2": P/N E00-011-000
 3/4": P/N E00-021-000

Type: 90°, Screw-in
Material: Die Cast
Specify Size:
 1/2": P/N E00-012-000
 3/4": P/N E00-022-000

Note: AC Connectors are available in bulk quantities. Contact EPCO's Inside Sales Department for more specific information.

Power/Appliance Cords

- UL Listed.
- Meets the requirements of the 2008 NEC Code, Article 422.16.

SPT Flat and SJT Round Power/Appliance Cords are used for typical applications such as installation of garbage disposals, dishwashers or similar appliances. These Power/Appliance Cords can also be used for repairs of appliances, power tools or other electrical equipment.

The cords are 16 AWG or 14 AWG 3-wire heavy-duty vinyl conductors. One end is pre-stripped at the factory, the other end has a straight or right-angle grounded male plug.



Catalog Number	UPC Number	Description	Standard Package	Standard Package Ship Wt. (Lb.)
PCR3	10178	3-Foot: SPT 16/3, Right Angle Plug, Flat Cord - Black, 13 AMP	25/Carton	8
PCR4	10180	4-Foot: SPT 16/3, Right Angle Plug, Flat Cord - Black, 13 AMP	25/Carton	8
PCR6	10181	6-Foot: SPT 16/3, Right Angle Plug, Flat Cord - Black, 13 AMP	25/Carton	10
PCR8	10182	8-Foot: SPT 16/3, Right Angle Plug, Flat Cord - Black, 13 AMP	25/Carton	12
PCS3	10179	3-Foot: SPT 16/3, Straight Plug, Flat Cord - Black, 13 AMP	25/Carton	8
PCS4	10183	4-Foot: SPT 16/3, Straight Plug, Flat Cord - Black, 13 AMP	25/Carton	9
PCS6	10184	6-Foot: SPT 16/3, Straight Plug, Flat Cord - Black, 13 AMP	25/Carton	10
PCS8	10185	8-Foot: SPT 16/3, Straight Plug, Flat Cord - Black, 13 AMP	25/Carton	12
PCS12	10169	12-Foot: SPT 16/3, Straight Plug, Flat Cord - Black, 13 AMP	25/Carton	17
PSS3	10186	3-Foot: SJT 16/3, Straight Plug, Round Cord - Black, 13 AMP	25/Carton	8
PSS4	10168	4-Foot: SJT 16/3, Straight Plug, Round Cord - Black, 13 AMP	25/Carton	8
PSS6	10187	6-Foot: SJT 16/3, Straight Plug, Round Cord - Black, 13 AMP	25/Carton	10
PSS8	10188	8-Foot: SJT 16/3, Straight Plug, Round Cord - Black, 13 AMP	25/Carton	12
RSS3	10219	3-Foot: SPT16/3, with Receptacle, Round Cord - Black, 15 AMP	25/Carton	12
10950	10950	3-Foot: SPT 14/3, Straight Plug, Flat Cord - Beige, 15 AMP	25/Carton	9
10953	10953	6-Foot: SPT 14/3, Straight Plug, Flat Cord - Beige, 15 AMP	25/Carton	17
10956	10956	9-Foot: SPT 14/3, Straight Plug, Flat Cord - Beige, 15 AMP	25/Carton	25

Extension Cords

- UL Listed.
- Constructed of AWG 14/3 and 12/3 SJTW Cord.
- LED Power Indicator - Indicates when the Extension Cord is energized.
- Multiple Outlets - Three "grounded outlets" allows the use of more than one power tool.
- Flexible - Resists stiffening, cracking or splitting under the most extreme weather conditions.
- Water-Resistant - The Extension Cord's outer jacket will not absorb water, protects the copper conductors and safeguards people and property from electrical shock hazard.
- Flame Retardant - The Extension Cord's outer jacket protects against accidental cord fire.
- Meets all requirements of the 2008 NEC as well as OSHA Standards.



Catalog Number	UPC Number	Description	Standard Package	Master Carton	Master Carton Ship Wt. (Lb.)
14 AWG Medium-Duty Extension Cords - 50-Foot					
10652	10652	Standard Receptacle: 15 AMP - Orange	1/Pkg.	10/Pkgs.	36
10653	10653	LED Receptacle: 15 AMP - Orange	1/Pkg.	10/Pkgs.	37
10654	10654	Tri-Tap Receptacle: 15 AMP - Orange	1/Pkg.	10/Pkgs.	38
14 AWG Medium-Duty Extension Cords - 100-Foot					
10655	10655	Standard Receptacle: 13 AMP - Orange	1/Pkg.	6/Pkgs.	44
10656	10656	LED Receptacle: 13 AMP - Orange	1/Pkg.	6/Pkgs.	45
10657	10657	Tri-Tap Receptacle: 13 AMP - Orange	1/Pkg.	6/Pkgs.	46
12 AWG Heavy-Duty Extension Cords - 50-Foot					
10660	10660	Standard Receptacle: 15 AMP - Orange	1/Pkg.	8/Pkgs.	42
10661	10661	LED Receptacle: 15 AMP - Orange	1/Pkg.	8/Pkgs.	42
10662	10662	Tri-Tap Receptacle: 15 AMP - Orange	1/Pkg.	8/Pkgs.	45

Dryer Cords

- Meets Canadian Standards Association (CSA) Approval.
- Meets 2008 NEC requirements, Article 422.33(A).
- Heavy-duty terminals ensure an excellent power quality connection.
- Right-angle plug for flush fit-to-wall.
- Strain Relief protects Dryer Cord from damage.




Catalog Number	UPC Number	Description	Standard Package	Master Carton	Master Carton Ship Wt. (Lb.)
40020	40020	4-Foot: SRDT 10/3 3-Wire 30 AMP Dryer Cord, Gray	1/Pkg.	32/Pkgs.	35
40021	40021	6-Foot: SRDT 10/3 3-Wire 30 AMP Dryer Cord, Gray	1/Pkg.	32/Pkgs.	51
40030	40030	4-Foot: SRDT 10/4 4-Wire 30 AMP Dryer Cord, Black	1/Pkg.	16/Pkgs.	27
40031	40031	6-Foot: SRDT 10/4 4-Wire 30 AMP Dryer Cord, Black	1/Pkg.	16/Pkgs.	35

Range Cords

- Meets Canadian Standards Association (CSA) Approval.
- Meets 2008 NEC requirements, Article 422.33(A).
- Heavy-duty terminals ensure an excellent power quality connection.
- Right-angle plug for flush fit-to-wall.
- Strain Relief protects Range Cord from damage.



Catalog Number	UPC Number	Description	Standard Package	Master Carton	Master Carton Ship Wt. (Lb.)
40000	40000	4-Foot: SRDT 6/2 and 8/1 3-Wire 50 AMP Range Cord, Gray	1/Pkg.	16/Pkgs.	27
40001	40001	6-Foot: SRDT 6/2 and 8/1 3-Wire 50 AMP Range Cord, Gray	1/Pkg.	16/Pkgs.	35
40010	40010	4-Foot: SRDT 6/2 and 8/2 4-Wire 50 AMP Range Cord, Black	1/Pkg.	12/Pkgs.	33
40011	40011	6-Foot: SRDT 6/2 and 8/2 4-Wire 50 AMP Range Cord, Black	1/Pkg.	12/Pkgs.	38

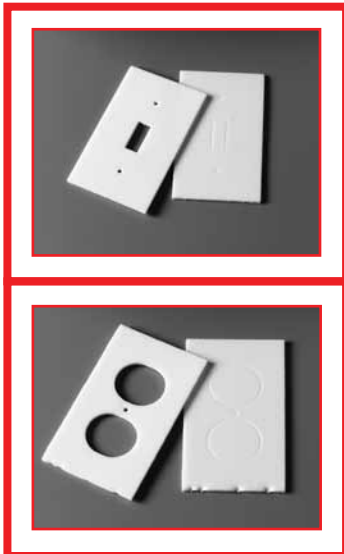

Wall Plate Insulation Gasket

Energy saving gasket prevents heat and cold loss through outlets and switches that are located on outside walls.

- Easy to install. Only a screwdriver is required.
- Flame retardant close cell polyethylene insulating foam.
- One-piece design fits toggle, duplex receptacle or Decora style wall plates.
- Fits duplex receptacles and multi-gang boxes.

Note: Each gasket is perforated to Standard or Decora.

Catalog Number	UPC Number	Description	Standard Package	Standard Package Ship Wt. (Lb.)
10938	10938	Wall Plate Insulation Gasket	100/Pkg.	2

Distributed By: