


Linear Vapor Tight Light Fixture Part Number Configurator (Does Not Include Lamps)

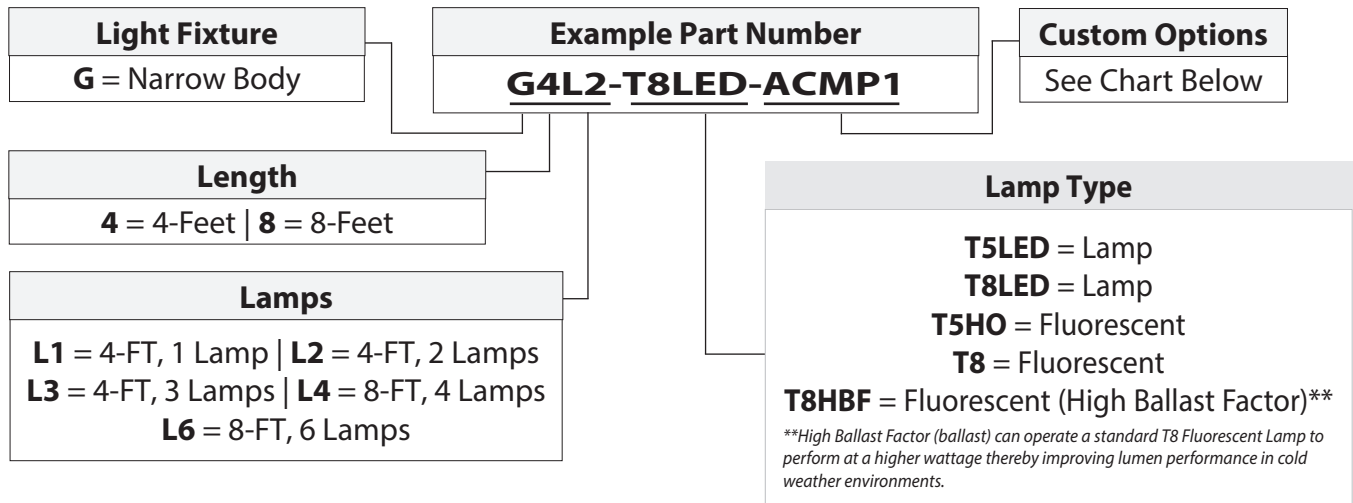

Light Fixture Options

Option	Notes
A. 6-Foot Power Cord (PSS6)	Straight Plug, 13 AMP
A1. 6-Foot Twist Lock Power Cord	L5-15P, 120V
A2. 6-Foot Twist Lock Power Cord	L7-15P, 277V
C. Acetal (Plastic) Latches	<u>Not</u> recommended for the following applications: Swimming Pools, Car Washes, Food Processing (because of the cleaning chemicals), or Agriculture (because of the ammonia)
S. Stainless Steel Latches	Withstands extreme temperatures for refrigerator and freezer applications, as well as the chemicals present in car washes. Stainless steel latches are also impervious to acidic conditions making them suitable for use in livestock containment buildings.
E1. Emergency Battery Back-up Ballast	For T5HO or T8 Fluorescent Light Fixtures only. Two (2) lamps is the maximum lamp configuration when specifying a T5HO or T8 2-foot light fixture with an Emergency Battery Back-up Ballast.
L. Luminaire Disconnect	Luminaire Disconnect standard on all Linear Vapor Tight Light Fixtures.
M. Ceiling and Wall Mount Mounting Hardware	Powder Coated (Not National Sanitation Foundation approved for food service applications)
M1. Ceiling and Wall Mount Mounting Hardware	Stainless Steel (National Sanitation Foundation approved)
M2. 45-Degree Mounting Hardware	45-Degree Angle Stainless Steel (National Sanitation Foundation approved)
P. Clear Ribbed Diffuser	Standard for all Fluorescent Light Fixtures.
P1. Frosted Ribbed Diffuser	Standard for all T5 LED and T8 LED Lamped Light Fixtures. Available option for Fluorescent Lamp Light Fixtures.
Occupancy Sensors R1. Passive infrared – Dry Locations R2. Passive infrared – Dry/Cold Locations R3. Passive infrared – Wet Locations R4. Microwave – On/Off Only R5. Microwave – 0-10V Dimming, 30% R6. Microwave – 0-10V Dimming, 50%	Two Occupancy Sensors Types available: <ul style="list-style-type: none"> ■ High/Medium Bay Passive Infrared (PIR) Occupancy Sensors: Recommended for ceiling heights 15-feet or higher. PIR sensors function as an automatic lighting control in high and medium bay applications. ■ Microwave Sensors: Recommended for ceiling heights 15-feet or lower. The microwave sensor detects the slightest movement in the occupancy zone. Detection is sensed through doors, glass, or thin walls. Note: Long Lead Times.
Surface Mount Bracket Y1 (4-feet). Large and Small Bracket Y2 (4-feet). Large Bracket Y1 (8-feet). Large and Small Bracket Y2 (8-feet). Large and Small Bracket Y3 (8-feet). Large and Small Bracket (2)	Allows installation of a fixture directly under or over a junction box to surface mount to a ceiling or wall. Provides a water and bug resistant seal protecting the critical area between the junction box's supply conductors and the fixture. No adhesive sealant or gasket material is required. EPCO will pre-drill a hole in the fixture housing at designated locations to facilitate pulling the supply conductors from the junction box and into the fixture housing.
Z. Bulk Packaging	25 or 50 per skid (eliminates individual carton packaging on the job site).