



Linear Luminaire Accessories

OCCUPANCY SENSOR

Our Occupancy Sensor (OS) is the energy and cost efficient method to manage illumination systems in applications such as stairwells, warehouses, utility and maintenance buildings, storage areas, tunnels and more.

Installing occupancy sensors can reduce energy consumption up to 45% or more by operating similar to a light switch. The sensor turns the lights on when it senses activity in a room or area, and then turns the light off automatically after sensing no activity after a preset time.

Microwave Sensor (Options R4, R5, and R6): Recommended for ceiling heights 20-feet or lower. This microwave sensor type covers a wide range and detects the slightest movement in its occupancy zone. Detection is sensed through doors, glass, or thin walls.




Microwave Occupancy Sensor
(Options R4, R5 and R6)

LIGHT FIXTURE AND LUMINAIRE SUSPENSION

The Suspension Kit (P/N: GFF-FSSK) provides instant and “tool-less” infinite height adjustment when installing our luminaires. Kits are maintenance-free and require no ongoing adjustments.

- Easily suspends luminaires, signage, mechanical, HVAC systems, and other objects that require suspension from beams, trusses or joists.
- Eliminate the need for chain, S-Hooks, threaded rods and strut support nuts
- Safe Working Load: 90 lbs. (45 kg.)
- Minimal breaking strength: 420 lbs. (190.5 kg.)
- Maximum load rating for one (1) cable: 62 lbs. (28.1 kg.)
- Maximum load rating for two (2) cables: 124 lbs. (56.2 kg.)
- One (1) kit includes: Two (2) 1/16" (1.587 mm) x 10-foot galvanized steel cables with two (2) attached spring-loaded steel hooks and two (2) tool-less suspension cable adjustment blocks. Steel Hook Inside Diameter: 0.5".
- Suspension Cable Length: 100-inches with two (2) 20-inch Y-cables and two (2) swaged spring-loaded steel hooks with bright nickel plating on Y-cable ends with fuse cut cable to prevent fraying.

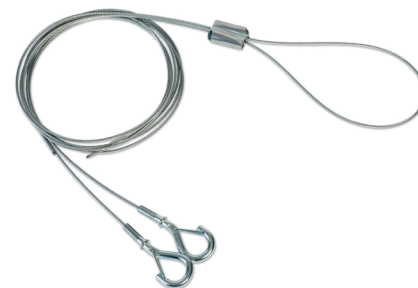

Suspension System Kit
Part Number: GFF-FSSK

Part Number	UPC Number	Description	Order Unit	Unit Qty	Unit Pkg	Units/ Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
GFF-FSSK	14256	Suspension System Kit	EA	2	BG	12	12	12	Yes	5

UNITS OF MEASURE KEY

Order Unit: The Unit to be ordered; Order Qty: Number of pieces in each Unit; Unit Pkg: Packaging types - BG (Bag), BX (Box), BRL (Barrel); Units/Case: Unit packages contained in the Case; TL Case Qty: The total number of items in each Master Case; Min Order Qty: The smallest Unit that can be ordered; MM Req: Must order multiples of the Unit in the stated quantities; Ship Wt (Lbs): Total weight of the units per Carton



LUMINAIRE HOUSING LATCH OPTIONS

LED and Fluorescent Linear Luminaires can be ordered with your choice of Acetal (Plastic) or Stainless Steel Latches. Both cam-type latch options accommodate a variety of application environments.

Acetal (Plastic) Latches (GFF-LC2 or Option C) provide an exceptional combination of heat resistance, durability and strength over a wide range of ambient temperatures with minimal attachment of airborne particles.

Stainless Steel Latches (GFF-L2SS or Option S) are ideal for food processing facilities and related applications. These latches can withstand extreme temperatures for refrigerator and freezer applications as well as the chemicals present in car washes. They are also impervious to acidic conditions making them suitable for use in livestock containment buildings.



Acetal Latch
Part Number:
GFF-LC2



Stainless Steel
Latch
Part Number:
GFF-L2SS

Part Number	UPC Number	Description	Order Unit	Unit Qty	Unit Pkg	Units/ Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
GFF-L2C	14336	Replacement Acetal (Plastic) Latches: for 2-FT Linear Luminaires	BG	6	BG	0	0	6	Yes	1
GFF-L2SS	14337	Replacement Stainless Steel Latches: for 2-FT Linear Luminaires	BG	6	BG	0	0	6	Yes	1
GFF-L4C	14240	Replacement Acetal (Plastic) Latches: for 4-FT Linear Luminaires	BG	8	BG	0	0	8	Yes	1
GFF-L4SS	14239	Replacement Stainless Steel Latches: for 4-FT Linear Luminaires	BG	8	BG	0	0	8	Yes	1
GFF-L8C	14250	Replacement Acetal (Plastic) Latches: for 8-FT Linear Luminaires	BG	14	BG	0	0	14	Yes	1
GFF-L8SS	14249	Replacement Stainless Steel Latches: for 8-FT Linear Luminaires	BG	14	BG	0	0	14	Yes	1

8-FOOT TWIST LOCK POWER CORD

Built to the NEMA standard, this locking power cord plug is rated for 120V or 277V circuits, has a fully molded low profile ergonomic shape, and is RoHS compliant. The plug body is molded with deeply contoured ridges and a non-slip grip that makes “plug-in” quick and easy.

Twist Lock Power Cords



Part Number:
TL001



Part Number:
TL001-White

Part Number	UPC Number	Description	Order Unit	Unit Qty	Unit Pkg	Units/ Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
TL001	10196	8 Foot, 13 AMP, 120V, Black, L5-15P	EA	1	BX	1	1	1	No	2
TL002	10197	8 Foot, 13 AMP, 277V, Black, L5-15P	EA	1	BX	1	1	1	No	2
TL001-White	10658	8 Foot, 13 AMP 120V, White, L5-15P	EA	1	BX	1	1	1	No	2
TL002-White	10659	8 Foot, 13 AMP 277V, White, L5-15P	EA	1	BX	1	1	1	No	2

UNITS OF MEASURE KEY

Order Unit: The Unit to be ordered; Order Qty: Number of pieces in each Unit; Unit Pkg: Packaging types - BG (Bag), BX (Box), BRL (Barrel); Units/Case: Unit packages contained in the Case; TL Case Qty: The total number of items in each Master Case; Min Order Qty: The smallest Unit that can be ordered; MM Req: Must order multiples of the Unit in the stated quantities; Ship Wt (Lbs): Total weight of the units per Carton



LINEAR LUMINAIRE DIFFUSERS

- 100% Impact Resistant Acrylic Diffusers.
- No tools or fasteners are required for installation.

Frosted Smooth Diffuser is standard on all LED Vapor Tight Luminaires.

Frosted Ribbed Diffused is standard on all LED Strips and T5 or T8 LED Luminaires.

An option on all Fluorescent Light Fixtures.



Frosted Smooth Diffuser
Part Number:
GFF-DS2



Frosted Ribbed Diffuser
Part Number:
GFF-DF2



Part Number	UPC Number	Description	Order Unit	Unit Qty	Unit Pkg	Units/Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
GFF-DS2	14581	Replacement Frosted Smooth Diffuser: for 2-FT LED Linear Luminaires	EA	1	BX	5	5	5	Yes	6
GFF-DS4	14582	Replacement Frosted Smooth Diffuser: for 4-FT LED Linear Luminaires	EA	1	BX	5	5	5	Yes	10
GFF-DS8	14583	Replacement Frosted Smooth Diffuser: for 8-FT LED Linear Luminaires	EA	1	BX	5	5	5	Yes	14
GFF-DF2	14452	Replacement Frosted Ribbed Diffuser: for 2-FT LED Linear Luminaires	EA	1	BX	5	5	5	Yes	5
GFF-DF4	14453	Replacement Frosted Ribbed Diffuser: for 4-FT LED Linear Luminaires	EA	1	BX	5	5	5	Yes	10
GFF-DF8	14454	Replacement Frosted Ribbed Diffuser: for 8-FT LED Linear Luminaires	EA	1	BX	5	5	5	Yes	21

UNITS OF MEASURE KEY

Order Unit: The Unit to be ordered; Order Qty: Number of pieces in each Unit; Unit Pkg: Packaging types - BG (Bag), BX (Box), BRL (Barrel); Units/Case: Unit packages contained in the Case; TL Case Qty: The total number of items in each Master Case; Min Order Qty: The smallest Unit that can be ordered; MM Req: Must order multiples of the Unit in the stated quantities; Ship Wt (Lbs): Total weight of the units per Carton



The Luminaire Mounting Hardware includes two (2) “snap-on” mounting brackets that attach to the outside edge of the luminaire housing. P/N GFF-MH (Option MH) is standard and comes with a powder coated finish. P/N GFF-MHS (Option MHS) comes with a stainless steel finish. Both are suitable for ceiling or wall mount applications but can also be used with chain or cable mounting applications when using the S-Hooks.

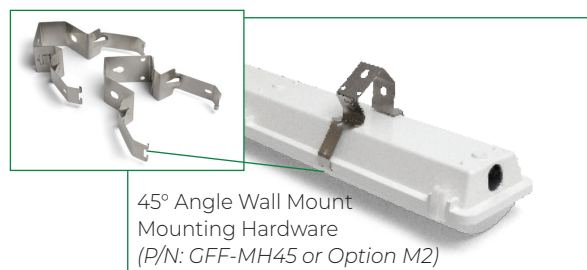

Part Number	UPC Number	Description	Order Unit	Unit Qty	Unit Pkg	Units/ Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
GFF-MH	14241	White Powder Coated Luminaire Mounting Hardware: for Ceiling and Wall Mount Applications	BG	2	BG	0	0	2	Yes	1
GFF-MHS	14352	Stainless Steel Luminaire Mounting Hardware: for Ceiling and Wall Mount Applications	BG	2	BG	0	0	2	Yes	1
GFF-MH45	50005	45° Angle Stainless Steel Luminaire Mounting Hardware: for Wall Mount Applications	BG	2	BG	0	0	2	Yes	1

Units/Unit: The Unit to be ordered; Order Qty: Number of pieces in each Unit; Unit Pkg: Packaging types - BG (Bag), BX (Box), BRL (Barrel); Units/Case: Unit packages contained in the Case; TL Case Qty: The total number of items in each Master Case; Min Order Qty: The smallest Unit that can be ordered; MM Req: Must order multiples of the Unit in the stated quantities; Ship Wt (Lbs): Total weight of the units per Carton



LUMINAIRE MOUNTING HARDWARE

Our UL Listed Duct Seal Compound is used to seal around junction boxes, flashings, service mast and cable entries. Duct Seal Compound is available in individual 1 lb. bricks, five (5) 1 lb. bricks in one (1) package, or a 5 lb. brick. Each Duct Seal package is individually wrapped in release paper to simplify handling and repackaging.

- Asbestos-free compound
- Temperature tolerance: -40 ° F (-40 ° C) to 180 ° F (82 ° C).
- Excellent adhesive properties for use on wood, glass, aluminum and steel.
- Odorless non-sticky formula.
- Can be painted immediately.
- Meets the requirements of the 2023 National Electrical Code: Articles 230.8.

Note: None of the components of this product are hazardous as defined by OSHA Hazard Communication Standard (29 CFR 1910.1200). For more information, visit our website at engproducts.com/Resources to view the Duct Seal MSDS Sheet.



Part Number	UPC Number	Description	Order Unit	Unit Qty	Unit Pkg	Units/ Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
EPD1	10101	Duct Seal: 1 Lb. Slug	LB	1	BX	50	50	q	No	1
EPD5	10102	Duct Seal: Package of Five (5) 1 Lb. Slugs	LB	5	BX	10	10	5	Yes	5
EPD5B	10105	Duct Seal: 5 Lb. Brick	LB	5	BX	10	10	5	No	5

TIE WIRE

Supports a variety of uses on the job site including bundling, supporting and hanging cable conduit and suspended luminaires. Available in 16 AWG Black Annealed or Galvanized rolls. Also available in 18 AWG Galvanized 30" pre-cut lengths.

Tie Wire: 18 AWG Galvanized Straight Wire

Carbon: C1008 Soft Annealed

Yield: LB/FT = .0104 (104 FT/LB)

Size: .047" Diameter (plus/minus .001")

Tensile/Breaking Strength: 75 lb. max. PSI; 105-135 lbs.

ASTM: Zinc Coating; Meets A641 that requires no minimum ounces of zinc per square foot of surface area.

Federal Specification: QQ-W-461

Tie Wire: 16 AWG Black and Galvanized Coiled Wire

Carbon: C1008 Soft Annealed

Yield: LB/FT = .0104 (104 FT/LB)

Size: .0625" Diameter (plus/minus .001")

Tensile/Breaking Strength: 45-60,000 PSI

ASTM: Zinc Coating; Meets A641 that requires no minimum ounces of zinc per square foot of surface area.

Federal Specification: QQ-W-461

Tie Wire



Part Number	UPC Number	Description	Order Unit	Unit Qty	Unit Pkg	Units/ Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
TY16	10150	16 AWG Black Tie Wire: 350-FT per Roll	EA	1	BX	20	20	20	Yes	70
TY16G	10152	16 AWG Galvanized Tie Wire: 350-FT per Roll	EA	1	BX	20	20	20	Yes	70
TY18G	10151	18 AWG Galvanized Tie Wire: 30" Length	EA	1	BX	1750	1750	1750	Yes	25
TY18G-50B	12000	18 AWG Galvanized Tie Wire: 30" Length, 50 per Bundle	EA	1	BX	35	35	1	No	25

LUMINAIRE HANGERS

Our UL Listed Duct Seal Compound is used to seal around junction boxes, flashings, service mast and cable entries. Duct Seal Compound is available in individual 1 lb. bricks, five (5) 1 lb. bricks in one (1) package, or a 5 lb. brick. Each Duct Seal package is individually wrapped in release paper to simplify handling and repackaging.

Part Number	UPC Number	Description	Order Unit	Unit Qty	Unit Pkg	Units/ Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
SMH	10726	11 AWG Plated Luminaire Hangers: Side Mount	BX	100	BX	100	100	100	Yes	5
TMH	10725	10 AWG Plated Luminaire Hangers: Top Mount	BX	100	BX	100	100	100	Yes	7

UNITS OF MEASURE KEY

Order Unit: The Unit to be ordered; Order Qty: Number of pieces in each Unit; Unit Pkg: Packaging types - BG (Bag), BX (Box), BRL (Barrel); Units/Case: Unit packages contained in the Case; TL Case Qty: The total number of items in each Master Case; Min Order Qty: The smallest Unit that can be ordered; MM Req: Must order multiples of the Unit in the stated quantities; Ship Wt (Lbs): Total weight of the units per Carton



SINGLE LOOP JACK CHAIN

Single Loop Jack Chain is used to support suspended luminaires and is often required by code in many cities. We package the chain in convenient 50 and 100-foot boxes.

Single Loop Jack Chain




Trade Size	Wire Gauge	Wire Diameter Inches	Length Per 100 Link Inches	Weight Per 100 Feet Pounds	Working Load Limit Pounds	Break Test Load Pounds
12	13	.105	75	8.5	29 Lbs	115 Lbs
10	12	.135	95	14.7	43 Lbs	170 Lbs

Part Number	UPC Number	Description	Order Unit	Unit Qty	Unit Pkg	Units/Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
JC10B/100B	10201	10 AWG Bright Jack Chain: 100-FT per Carton	FT	100	BX	5	500	100	Yes	80
JC12B/100	11703	12 AWG Bright Jack Chain: 100-FT Spool	FT	100	BX	5	500	100	Yes	45
JC12B/100B	10203	12 AWG Bright Jack Chain: 100-FT per Carton	FT	100	BX	5	500	100	Yes	45

S-HOOKS

S-Hooks are used with Jack Chain to support suspended luminaires. All S-Hooks are plated for lasting durability. Two (2) sizes are available ranging from 1.125" length 12 AWG wire to 1.25" length 10 AWG wire.

S-Hooks



Trade Size	Wire Gauge	Wire Diameter Inches	Length	Working Load Limit Pounds	Minimum Strength
SH10	10	.135	1.25"	48 Lbs	190 Lbs
SH12	12	.105	1.125"	32 Lbs	97 Lbs

Part Number	UPC Number	Description	Order Unit	Unit Qty	Unit Pkg	Units/Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
SH10	10251	10 AWG S-Hooks: 1.25" Length	BG	100	BG	10	1000	100	Yes	11
SH12	10252	12 AWG Plated S-Hooks: 1.125" Length	BG	100	BG	10	1000	100	Yes	10

PRODUCT WARRANTY

Unless otherwise noted, Engineered Products Company (herein known as EPCO) warrants that the products described herein, will be furnished free from defects in material and workmanship for one (1) year. Any exceptions to this Warranty Statement will be detailed within the respective warranty section in this product catalog, noted on the product itself, or the product packaging.

EPCO's sole obligation for any breach of warranty under the terms herein shall be, at our option, to repair or provide replacement for the Product to which such warranty is breached, or to return all payments made with respect to such product. Any product(s) that are deemed to be defective must be specified by the Purchaser in a written notice to EPCO's Warranty Department within one (1) year after receipt of such goods. Under no circumstances will EPCO be liable for loss of profits or incidental, indirect, consequential or special damages of any kind beyond the replacement cost of the defective merchandise.

EPCO shall not be liable for any losses arising from governmental action, an act of God, or the result of war, riot, strikes, civil commotion, sovereign conduct, or the act or conduct of any person or persons not party to or associated with EPCO.

UNITS OF MEASURE KEY

Order Unit: The Unit to be ordered; Order Qty: Number of pieces in each Unit; Unit Pkg: Packaging types - BG (Bag), BX (Box), BRL (Barrel); Units/Case: Unit packages contained in the Case; TL Case Qty: The total number of items in each Master Case; Min Order Qty: The smallest Unit that can be ordered; MM Req: Must order multiples of the Unit in the stated quantities; Ship Wt (Lbs): Total weight of the units per Carton

