




## Dual Rated Butt Splice Kits

Part Numbers: DRBSK, DRBSK1 and DRBSK3




RISK OF  
ELECTRIC  
SHOCK

- TO BE INSTALLED BY A QUALIFIED ELECTRICIAN
- WARNING: ELECTRICAL SHOCK HAZARD
- MAKE SURE THAT THE POWER IS "OFF" AT THE CIRCUIT BREAKER BEFORE PROCEEDING


**NOTE:** The Dual Rated Butt Splice Kits meet the requirements of the 2017 National Electrical Code: Articles 110.14(B), 300.5(E) and 300.50(D).




1. Slide the enclosed long piece of heat shrink tubing over the end of one wire. Then slide the enclosed short piece of heat shrink tubing over the other wire.



2. Strip insulation from conductor to be spliced.
3. Insert stripped conductors into butt splice connector. Torque tighten set screws.
4. Slide the short piece of heat shrink tubing over connector and center it. Apply heat to the heat shrink tubing with a soft flame torch or heat gun, starting in the middle of the tube and moving to each end.
5. Repeat Step 4 using the long heat shrink tube.

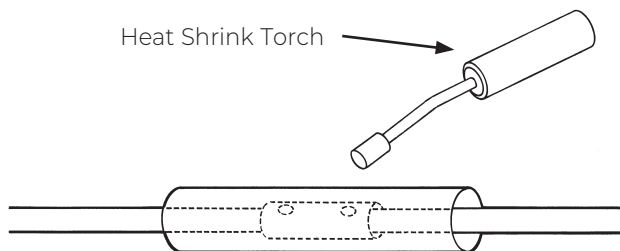

6. Properly installed, shrink tubing will be smooth and conform to the cable. Adhesive should be visible at each end of the shrink tubing.



Stock Code: E00-707-001

(08/25 EB)

