



ENGINEERED PRODUCTS CO.
epco[®]

YOUR TRUSTED ELECTRICAL SPECIALTY
SOLUTIONS PARTNER SINCE 1976

PRODUCT CATALOG | VOLUME XXIV
www.engproducts.com | 800.336.1976

About EPCO

Since our founding in 1976, EPCO has operated on a foundation of tradition and a deep, personal commitment to our customers. We've always believed that our success is directly tied to your satisfaction, which is why exceptional customer service is not just a goal - it's at the core of everything we do.



Rooted in family tradition, we operate with a unique blend of personal commitment and a long-term vision for stability and sustained excellence. We take immense pride in our work and stand behind every product we create, ensuring we deliver the highest quality and best value possible.

Each item in this catalog is a testament to our dedication to excellence, crafted with an unwavering focus on durability, performance, and reliability. Thank you for being a part of our history. We are honored to serve you and are committed to continuing our tradition of providing exceptional products and service for years to come.

Sincerely,
Nick Lee
Vice President
EPCO | Engineered Products Co.

Units of Measure:

- Unit Qty: Number of pieces in each unit
- Unit Pkg: Unit packages contained in the case
- Case Qty: The total number of items in each master case
- Min Order Qty: The smallest unit that can be ordered
- Ship Wt (Lbs): The total weight of the units per Case

General Statements:

Specifications subject to change without prior notice. PigTails, PowerTails, QuickWhips, ProSeries, Landscape LightPost, SplicePost, and Receptacle SplicePost, Temp Power Block, TIGRESS, TIGRESS Prefab, TIGER XL, TIGERcub, SPIDERBOX and CordLights are either trademarks or registered trademarks for Engineered Products Company in the United States and/or in other countries. All other trademarks are the property of their respective holders. EPCO products are designed, manufactured, and independently verified to meet the most recent safety and performance requirements of Underwriters Laboratory (UL). Installation of EPCO products should be in accordance with the 2026 Edition of the National Electrical Code (NEC) and all applicable local electrical codes and regulations.

Icon Legend:



Table of Contents

DATA CENTER PRODUCTS

Grounding Jumper Kits	2
Power Distribution Tap-Off Boxes	3
Temporary Lighting	4
Temporary Power Block	5
AirGuard Floor Grommets	5

PIGTAILS AND POWERTAILS WIRING CONDUCTORS

Ground Bonding PigTails	6
Single and Dual-Gang PigTails	8
PowerTails Device Wiring Conductors	9
Ground Bonding Application Examples	8-9
Ground Screws and Ground Clips	10
Ground Bonding Jumper Kits	11

PREFABRICATED WHIPS

Illumination Control (IC)/Dimming Whips	12-13
Standard Fixture Whips	14
QuickWhip Fixture Whips	14
Custom Fixture Whip Order Form	15
Metal Clad (MC) Whips	16
A/C and Power Equipment Whips	17

TEMPORARY POWER

Temp Power Block	18
Replacement Components	19
50 & 100 -ft. Temp Power Cords	20

TEMPORARY LIGHTING

TIGER XL	21
TIGERcub	21
TIGRESS Prefab	22
TIGRESS Multi-Lamp	23
LED CordLights	23
Economy CordLights	24
Accessories	25

UTILITY LIGHTING

Utility Lighting	26
Modular Utility Lighting	27
Complete LED Fixtures	28
Complete Medium Base (E26) Fixtures	29
Utility Luminaire Retrofits	30
LED Light Engines	31
Junction Boxes	32
Optional Accessories	33
Lamp Holders	33

LANDSCAPE LIGHT POSTS

LightPost	34-35
SplicePost	34-35
Receptacle Post	34-35

SPLICE KITS AND HEAT SHRINK TUBING

UF Cable Splice Kit	36
UF Stretcher Kit	36
Dual Rated Butt Splice Kits	37
Heat Shrink Torch	37
Copper Butt Splice Kits	38
Splice Kits AWG Chart	38
Heat Shrink Tubing	39-41

OTHER PRODUCTS/ACCESSORIES

Duct Seal Compound	42
QR CODE REFERENCE	43

PART NUMBER INDEX

WARRANTY

LEGEND

Data Center Products

Powering Data Centers from Construction to the White Space

EPCO delivers jobsite-ready solutions built for the speed and demands of data center construction. From grounding and temporary power to lighting, distribution, and cable management, our products drive safe, efficient installs at every phase.

Featuring Grounding Jumper Kits, Temp Power and Lighting, Power Distribution Tap-Off Boxes, and AirGuard Floor Grommets, EPCO solutions are engineered for fast installation, code compliance, and reliable performance on mission-critical builds.



Grounding Jumper Kits

Designed to create secure, low-resistance electrical bonds between busbars, enclosures, and grounding points. Engineered to eliminate site waste and accelerate IT infrastructure deployment.



**12" Jumper Kit Part Number:
EGBP-06-12-00-00**

Ground Jumper Kits				
Item Part #	Description	Unit	Pkg	Min Order Qty
EGBP-06-12-00-00	12" Jumper Kit, Two (2) Straight Lugs	1	BAG	1
EGBP-06-24-00-00	24" Jumper Kit, Two (2) Straight Lugs	1	BAG	1
EGBP-06-36-00-00	36" Jumper Kit, Two (2) Straight Lugs	1	BAG	1
EGBP-06-72-00-S	72" Jumper Kit, One (1) Straight Lug, 1" Captive Strip on Opposite End	1	BAG	1
EGBP-06-120-00-S	120" Jumper Kit, One (1) Straight Lug, 1" Captive Strip on Opposite End	1	BAG	1

Custom configurations available, email sales@engproducts.com to learn more.

Data Center Products

Power Distribution Tap-Off Boxes



Busway Solutions Tap-Off Boxes provide a safe, flexible way to distribute power across data center environments. Designed for quick installation and custom-built to your specifications, they deliver reliable branch circuit connections that keep projects moving while supporting scalable, high-density power needs. Tap-Off Boxes are engineered for full compatibility with Starline's T5 series busway system, delivering safe, reliable, and secure power distribution.



To learn more, email EPCO at sales@engproducts.com

Data Center Products



Temporary Lighting

Built for the pace of data center jobsites, TIGRESS™ Prefab Customizable Temp Lighting helps crews install faster, cut rework, and stay productive. With spec-driven configurability and flexible connector and cord options, it adapts to your jobsite so you can keep the project moving. Ask about our bulk packaging options to minimize unboxing time.





TIGRESS Prefab with Custom Connectors

TIGRESS™ Prefab Temporary LED Light Fixture

	Item Part #	Input Voltage	Cord (12 AWG)	Lumen Output	Color Temp	Application	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	15742 (100-WATT)	120-277V	NO CORD*	15,000	5000K	Dry/damp Locations	1	4	1	4	5 yr
	15743 (150-WATT)	120-277V	NO CORD*	22,500	5000K	Dry/damp Locations	1	4	1	5	5 yr
<ul style="list-style-type: none"> *Compatible with JS Cord, NM-B cable, MC cable, & FMC whips when used with suitable connector. 											

TIGER™ XL Temporary LED Luminaire

	Item Part #	Cord	Wire AWG	Input Voltage	Watt	Lumen Output	Color Temp	Application	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	15738	35-ft. SJTW	16/3	Hardwired 120-277V	100W	15,000	5000K	Dry/damp Locations	1	4	4	19	5 yr
	15739	35-ft. SJTW	14/3	Hardwired 120-277V	150W	22,500	5000K	Dry/damp Locations	1	4	4	22	5 yr
<ul style="list-style-type: none"> Primary power: 1-ft., pre-stripped pigtail hard-wired directly into 120-277V circuit. Secondary power: 35-ft. power cord connects up to 3 additional TIGER XL luminaires. Maximum daisy chain is 4 units on 120V or 7 units on 277V for all units. 													

Custom configurations available, email sales@engproducts.com to learn more.

Data Center Products




Temp Power Block
Part Number 10960

Temporary Power Block

The EPCO Temp Power Block delivers centralized, jobsite-ready power distribution for early-stage data center builds. It enables contractors to safely feed multiple circuits from a single source, reducing setup time, improving cable management, and maintaining consistent, high-load power across the jobsite.

Temp Power Block and Replacement Components

Item Part #	Description	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
10960	Temp Power Block, 50A, 125/250V, (6) 20A Duplex 5-20R	1	1	1	42	1 yr
10961	Temp Power Cord, 50A, 50Ft., SEOW CS	1	1	1	31	1 yr
10962	Temp Power Cord, 50A, 100Ft., SEOW CS	1	1	1	61	1 yr

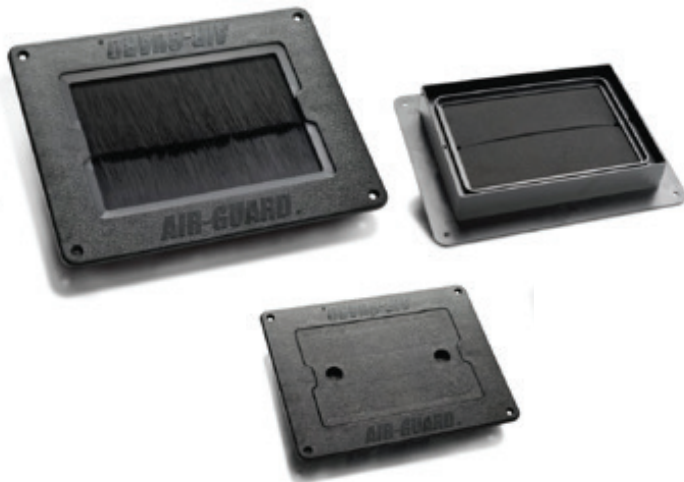

AirGuard Floor Grommets

AirGuard Floor Grommets seal unprotected floor openings to stop costly airflow loss at the source, reducing bypass airflow by over 97% and improving cooling efficiency across your data center. By restoring proper airflow and static pressure, they help deliver cool air where it's needed while lowering energy costs and protecting critical equipment. Designed for quick installation and long-term performance, AirGuard is a simple, cost-effective upgrade with immediate impact.

AirGuard Floor Grommets

Item Part #	Description	Unit Qty
116-800-015	AirGuard Extreme with Flush Mount GTAG2PDU	1
116-800-050	AirGuard 5" Round with Brush Rubber Gasket GTAG5R	1
116-800-022	AirGuard Perimeter Brush Kit, 24" GTAG524FPDU	1

To learn more, email
EPCO at sales@engproducts.com

Ground Bonding

Ground Bonding PigTails™

Feature a captive GSH (hex head) or GSC (cutting point) green grounding screw on one end, the other end is pre-stripped 5/8" or 1".

Part Number Legend

P/N with 202 Prefix = Bag

P/N with 100 Prefix = Bulk



Part Number 20209



Part Number 20204

Save 36% in Labor Costs

12 AWG					
Item Part #	Description	PigTails/Pkg	Total PigTails/ Case	Min Order Qty	Ship Wt./ Case (Lbs)
Stranded Wire with No Ground Screw					
20208*	8", One (1) Flanged Spade Terminal, Stripped 5/8"	50/BAG	1000	1 BAG	18
10008	8", One (1) Flanged Spade Terminal, Stripped 5/8" (BULK)	1000/CASE	1000	1 CASE	18
Stranded Wire with GSH Ground Screw					
20204*	8", One (1) Flanged Spade Terminal	50/BAG	1000	1 BAG	25
10004*	8", One (1) Flanged Spade Terminal (BULK)	1000/CASE	1000	1 CASE	25
20219	10", One (1) Flanged Spade Terminal	50/BAG	1000	1 BAG	30
10019	10", One (1) Flanged Spade Terminal (BULK)	1000/CASE	1000	1 CASE	30
20225	12", One (1) Flanged Spade Terminal	50/BAG	1000	1 BAG	34
10025	12", One (1) Flanged Spade Terminal (BULK)	1000/CASE	1000	1 CASE	34
20229*	8", Ring Terminal, Stripped 5/8"	50/BAG	1000	1 BAG	27
10029	8", Ring Terminal, Stripped 5/8" (BULK)	1000/CASE	1000	1 CASE	27
Stranded Wire with GSC Ground Screw					
20220	10", Ring Terminal, One (1) Flanged Spade Terminal	50/BAG	1000	1 BAG	30
10020	10", Ring Terminal, One (1) Flanged Spade Terminal (BULK)	1000/CASE	1000	1 CASE	30
20226	12", Ring Terminal, One (1) Flanged Spade Terminal	50/BAG	1000	1 BAG	34
10026	12", Ring Terminal, One (1) Flanged Spade Terminal (BULK)	1000/CASE	1000	1 CASE	34
20235	10", Ring Terminal, Stripped 5/8"	50/BAG	1000	1 BAG	26
10035	10", Ring Terminal, Stripped 5/8" (BULK)	1000/CASE	1000	1 CASE	26
20236	8", Ring Terminal, Stripped 5/8"	50/BAG	1000	1 BAG	23
10036	8", Ring Terminal, Stripped 5/8" (BULK)	1000/CASE	1000	1 CASE	23
20241	8", Ring Terminal, One (1) Flanged Spade Terminal	50/BAG	1000	1 BAG	26
10041	8", Ring Terminal, One (1) Flanged Spade Terminal (BULK)	1000/CASE	1000	1 CASE	26

* Contractor Preferred

Ground Bonding




12 AWG — continued

Item Part #	Description	PigTails/Pkg	Total PigTails/Case	Min Order Qty	Ship Wt./Case (Lbs)
Solid Wire with GSC Ground Screw					
20216	6.5", Captive GSC Ground Screw, Stripped 1"	50/BAG	1000	1 BAG	19
10016	6.5", Captive GSC Ground Screw, Stripped 1" (BULK)	1000/CASE	1000	1 CASE	19
20286	8", Captive GSC Ground Screw, Stripped 1"	50/BAG	1000	1 BAG	22
10086	8", Captive GSC Ground Screw, Stripped 1" (BULK)	1000/CASE	1000	1 CASE	22
20288	10", Captive GSC Ground Screw, Stripped 1"	50/BAG	1000	1 BAG	26
10088	10", Captive GSC Ground Screw, Stripped 1" (BULK)	1000/CASE	1000	1 CASE	26
Solid Wire with GSH Ground Screw					
20209*	6.5", Captive GSH Ground Screw, Stripped 1"	50/BAG	1000	1 BAG	18
10009*	6.5", Captive GSH Ground Screw, Stripped 1" (BULK)	1000/CASE	1000	1 CASE	18
20211*	8", Captive GSH Ground Screw, Stripped 1"	50/BAG	1000	1 BAG	21
10011*	8", Captive GSH Ground Screw, Stripped 1" (BULK)	1000/CASE	1000	1 CASE	21
20287	10", Captive GSH Ground Screw, Stripped 1"	50/BAG	1000	1 BAG	24
10087	10" Captive GSH Ground Screw, Stripped 1" (BULK)	1000/CASE	1000	1 CASE	24
20289	12", Captive GSH Ground Screw, Stripped 1"	50/BAG	1000	1 BAG	26
10089	12", Captive GSH Ground Screw, Stripped 1" (BULK)	1000/CASE	1000	1 CASE	26

14 AWG

Item Part #	Description	PigTails/Pkg	Total PigTails/Case	Min Order Qty	Ship Wt./Case (Lbs)
Stranded Wire with GSC Ground Screw					
20203	8", Captive GSC Ground Screw, One (1) Flanged Spade Terminal	50/BAG	1000	1 BAG	26
10003	8", Captive GSC Ground Screw, One (1) Flanged Spade Terminal (BULK)	1000/CASE	1000	1 CASE	26
Solid Wire with GSH Ground Screw					
20210	6.5", Captive GSH Ground Screw, Stripped 1"	50/BAG	1000	1 BAG	19
10010	6.5", Captive GSH Ground Screw, Stripped 1" (BULK)	1000/CASE	1000	1 CASE	19

10 AWG

Item Part #	Description	PigTails/Pkg	Total/Case	Min Order Qty	Ship Wt./Case (Lbs)
Solid Wire with GSC Ground Screw					
20297	8", Captive GSC Ground Screw, Stripped 1"	50/BAG	1000	1 BAG	24
10097	8", Captive GSC Ground Screw, Stripped 1" (BULK)	1000/CASE	1000	1 CASE	24
* Contractor Preferred				  	

Ground Bonding

Part Number Legend	
P/N with 202 Prefix =	Bag
P/N with 100 Prefix =	Bulk

Single and Dual-Gang Ground Bonding PigTails™




- Matched flanged spade and ring terminals to ensure a safe, reliable ground connection.
- 12 AWG only.
- * Contractor preferred.




8" Solid Wire Single-Gang PigTail
Part Number 20268




8" Solid Wire Dual-Gang PigTail
Part Number 20274

12 AWG					
Item Part #	Description	PigTails/ Pkg	Total/ Case	Min Order Qty	Ship Wt./ Case (Lbs)
Single-Gang PigTails with GSH Ground Screw					
20267	One (1) 8" Solid Wire Incoming Lead, Stripped 1" One (1) 8" Stranded Wire Conductor with Flanged Spade Terminal	20/BAG	400	1 BAG	17
10067*	One (1) 8" Solid Wire Incoming Lead, Stripped 1" One (1) 8" Stranded Wire Conductor with Flanged Spade Terminal (BULK)	500/BOX	500	1 BOX	21
20268	One (1) 8" Stranded Wire Incoming Lead, Stripped 5/8" One (1) 8" Stranded Wire Conductor with Flanged Spade Terminal	20/BAG	400	1 BAG	18
10068*	One (1) 8" Stranded Wire Incoming Lead, Stripped 5/8" One (1) 8" Stranded Wire Conductor with Flanged Spade Terminal (BULK)	500/BOX	500	1 BOX	22
Dual-Gang PigTails with GSH Ground Screw					
20270	Two (2) 8" Stranded Wire Conductors, each with Flanged Spade Terminal	20/BAG	400	1 BAG	18
10070	Two (2) 8" Stranded Wire Conductors, ea. w/ Flanged Spade Terminal (BULK)	500/BOX	500	1 BOX	23
20274	One (1) 8" Solid Wire Incoming Lead, Stripped 1"; Two (2) 8" Stranded Wire Conductors, each with Flanged Spade Terminal	20/BAG	400	1 BAG	25
10074	One (1) 8" Solid Wire Incoming Lead, Stripped 1"; Two (2) 8" Stranded Wire Conductors, ea. w/ Flanged Spade Terminal (BULK)	500/BOX	500	1 BOX	31
20275	One (1) 8" Stranded Wire Incoming Lead, Stripped 5/8"; Two (2) 8" Stranded Wire Conductors, each with Flanged Spade Terminal	20/BAG	400	1 BAG	25
10075	One (1) 8" Stranded Wire Incoming Lead, Stripped 5/8"; Two (2) 8" Stranded Wire Conductors, ea. w/ Flanged Spade Terminal (BULK)	500/BOX	500	1 BOX	31
* Contractor Preferred				  	

Ground Bonding PigTail™ and PowerTail® Application Examples:

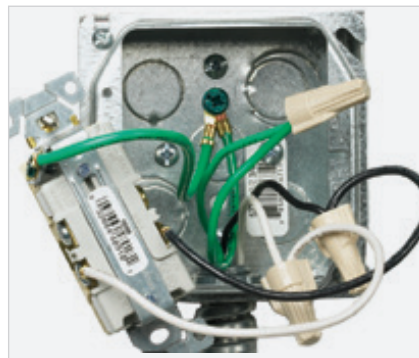


1 Single-Gang Solid Wire P/N 20267 PowerTails P/N 20262 and 20265

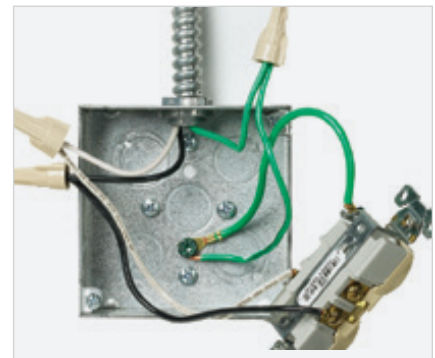

2 Single-Gang Stranded Wire P/N 20268, PowerTails P/N 20262 and 20265

PowerTails® Device Wiring Conductors


- Fast installation
- Reliable connection
- Perfect for pre-wiring devices in the shop or on-site

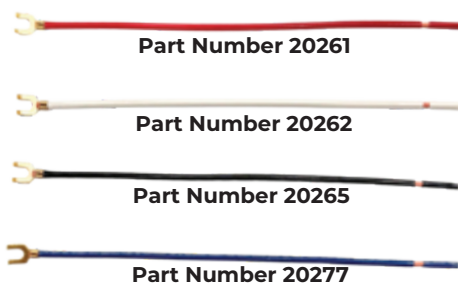


White: P/N 12796
Green: P/N 12797
Red: P/N 12798
Black: P/N 12795

12 AWG


Item Part #	Description	PowerTails/ Pkg	Total/ Case	Min Order Qty	Ship Wt./ Case (Lbs)
Stranded Wire with No Ground Screw					
20261	8", Red, Stripped 5/8", One (1) Flanged Spade Terminal	50/BAG	1000	1 BAG	18
10061	8", Red, Stripped 5/8", One (1) Flanged Spade Terminal (BULK)	1000/CASE	1000	1 CASE	18
20262	8", White, Stripped 5/8", One (1) Flanged Spade Terminal	50/BAG	1000	1 BAG	18
10062	8", White, Stripped 5/8", One (1) Flanged Spade Terminal (BULK)	1000/CASE	1000	1 CASE	18
20265	8", Black, Stripped 5/8", One (1) Flanged Spade Terminal	50/BAG	1000	1 BAG	18
10065	8", Black, Stripped 5/8", One (1) Flanged Spade Terminal (BULK)	1000/CASE	1000	1 CASE	18
20277	8", Blue, Stripped 5/8", One (1) Flanged Spade Terminal	50/BAG	1000	1 BAG	18
10077	8", Blue, Stripped 5/8", One (1) Flanged Spade Terminal (BULK)	1000/CASE	1000	1 CASE	18
Solid Wire with No Ground Screw					
12794	8", Blue, Stripped 1/2", One (1) Looped End (BULK)	1000/CASE	1000	1 CASE	18
12795	8", Black, Stripped 1/2", One (1) Looped End (BULK)	1000/CASE	1000	1 CASE	18
12796	8" White, Stripped 1/2", One (1) Looped End (BULK)	1000/CASE	1000	1 CASE	18
12797	8" Green, Stripped 1/2", One (1) Looped End (BULK)	1000/CASE	1000	1 CASE	18
12798	8" Red, Stripped, 1/2", One (1) Looped End (BULK)	1000/CASE	1000	1 CASE	18

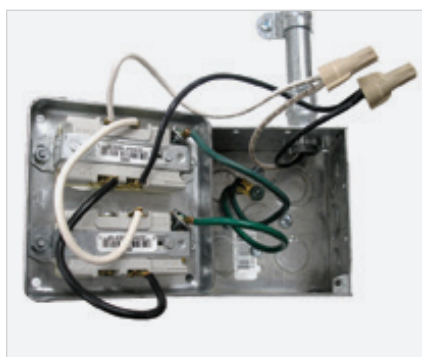

3 Dual-Gang Stranded Wire P/N 20270, PowerTails P/N 20262 and 20265

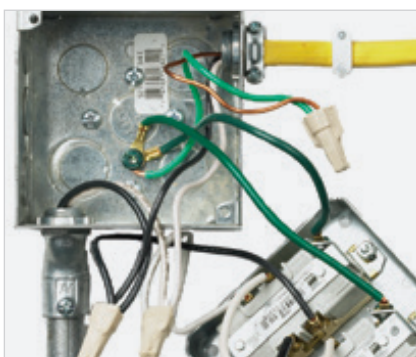

4 Dual-Gang Stranded Wire P/N 20275, PowerTails P/N 20262 and 20265

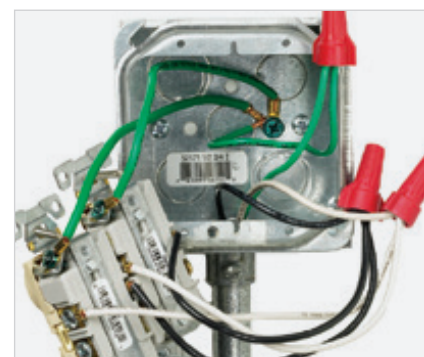


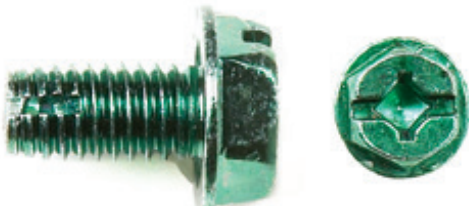
5 Dual-Gang Solid Wire P/N 20274, PowerTails P/N 20262 and 20265

Ground Bonding

Ground Screws and Ground Clips

- Hex head screw (GSH P/N 20251): Combination slotted, Phillips and square drive tapered point screw used to simplify wiring installations when pre-tapped holes exist in metal boxes.
- Cutting point screw (GSC P/N 20253): Combination hex head, slotted, Phillips and square drive screw for use in metal boxes when holes have not been pre-tapped.
- All Screws are #10-32 x .375.

Ground Screws						
Item Part #	Description	Unit	Units/Pkg	Total Units/Case	Min Order Qty	Ship Wt./ Case (Lbs)
20251	Slotted, #2 Phillips, Hex Head, #2 Robertson with Tapered Die Point	1	100/BAG	2000	1 BAG	10
20251T	Slotted, #2 Phillips, Hex Head, #2 Robertson with Tapered Die Point	1	250/BAG	5000	1 BAG	25
20051	Slotted, #2 Phillips, Hex Head, #2 Robertson with Tapered Die Point (BULK)	1	1000/CASE	1000	1 CASE	5
20253	Slotted, #2 Phillips, Hex Head, #2 Robertson with Cutting Point	1	100/BAG	2000	1 BAG	10
20253T	Slotted, #2 Phillips, Hex Head, #2 Robertson with Cutting Point	1	250/BAG	5000	1 BAG	25
20053	Slotted, #2 Phillips, Hex Head, #2 Robertson with Cutting Point (BULK)	1	1000/CASE	1000	1 CASE	5
Ground Clips						
20252	Ground clip: For 14-12 AWG Solid wire	1	100/BAG	2000	1 BAG	13
20052	Ground clip: For 14-12 AWG Solid wire	1	1000/CASE	1000	1 CASE	7
						



Cutting Point Screw: Part Number 20253



Hex head Screw: Part Number 20251



Ground Clip: Part Number 20252

Ground Bonding Jumper Kits

EPCO Pre-Fabricated Ground Bonding Jumper Kits are one of the most critical elements in a safely grounded system to provide a positive and effective connection to ensure a low-impedance ground-fault current path to safeguard personnel and property from electrical shock hazards. EPCO Ground Bonding Jumpers ensure the equipment ground is at the same potential as the earth.

FEATURES:

- The critical link between the grounded service conductor and the equipment ground conductor.
- Pre-crimped and ready to use right out of the box.
- Manufactured with corrosion-resistant, 6 AWG stranded copper wire.
- Ground Screws included in individually labeled poly bags.
- Includes one (1) 5cc tube of oxide inhibiting compound grease.
- Ground lugs standard with two (2) .25" holes and .625" hole spacing.
- Custom configurations available.



**120" Jumper Kit Part Number:
EGBP-06-120-00-S**



**12" Jumper Kit Part Number:
EGBP-06-12-00-00**



**36" Jumper Kit Part Number:
EGBP-06-36-00-00**

Ground Jumper Kits				
Item Part #	Description	Unit	Pkg	Min Order Qty
EGBP-06-12-00-00	12" Jumper Kit, Two (2) Straight Lugs	1	BAG	1
EGBP-06-24-00-00	24" Jumper Kit, Two (2) Straight Lugs	1	BAG	1
EGBP-06-36-00-00	36" Jumper Kit, Two (2) Straight Lugs	1	BAG	1
EGBP-06-72-00-S	72" Jumper Kit, One (1) Straight Lug, 1" Captive Strip on Opposite End	1	BAG	1
EGBP-06-120-00-S	120" Jumper Kit, One (1) Straight Lug, 1" Captive Strip on Opposite End	1	BAG	1



Prefabricated Whips

Our fixture whips are a cost-effective way to increase the electrical contractor's productivity, expedite installation time, and meet the electrical contractor's budget and application needs. EPCO's prefabricated whips are factory prepared wiring assemblies used for lighting and power distribution in commercial buildings. In addition, we custom build whips for the following applications:

- Illumination Control/Dimming Whips
- Standard Fixture Whips
- Air Conditioner Whips
- Custom Whips - We can cost effectively customize and produce any fixture whip configuration in any length, wire gauge size, and your choice of steel or liquid tight conduit.
- Healthcare-Grade Whips
- Metal Clad (MC) Whips
- QuickWhips™




Please scan the QR code to access our Custom Fixture Whip Order Form. Questions? Email inside sales at sales@engproducts.com.

Illumination Control/Dimming Whips

- Combines power and lighting control with Class 2 or Class 3 control circuits.
- Can be used with LED drivers, power and lighting digital controls to optimize lighting for daylight harvesting, occupancy sensors, or timing controls.
- Includes two (2) 16 AWG purple and pink jacketed illumination control/dimming wires.
- Available in stranded or solid wire, and with die cast screw-in lock-nut, or die-cast snap-in connectors.

When is it necessary to use Illumination Control/Dimming Whips?

- The connection(s) of the low voltage conductors from the LED driver is intended to go through the junction box, through the conduit nipple into the lighting control module for a networked lighting management system.
- When the electrical contractor wants to use a single, prefabricated fixture whip to power and include lighting controls.

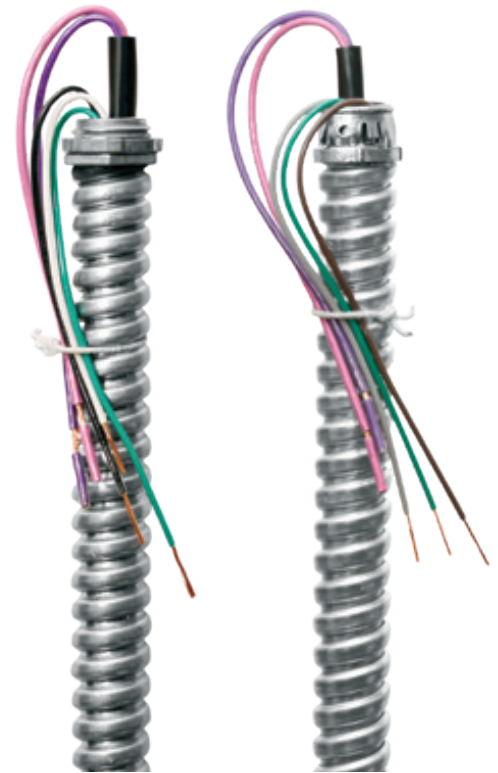

120-Volt, Die-Cast Screw-In Lock-Nut Connector

277-Volt, Die-Cast Snap-In Connector



Illumination Control/Dimming Whips In 3/8" Flexible Metal Conduit


- Manufactured using 3/8-inch flexible metal conduit (FMC) for 120 or 277-volt lighting systems. Includes the purple and pink jacketed control conductors.
- Includes two (2) 18 AWG purple and pink jacketed illumination control/dimming wires.
- An integral power and lighting control component for new or retrofit LED-based lighting systems.

FEATURES

- Available in stranded or solid wire, and with die cast screw-in lock-nut, or die-cast snap-in connectors. LED luminaires draw lower operating amperage and voltage to energize LED luminaires.
- Our 3/8" Illumination Control Fixture Whip use 18 AWG, 300-volt rated conductors designed to energize and provide illumination control of LED luminaires.
- Use to control the lumen output of the luminaire controls for daylight harvesting, occupancy sensors, or light timing controls.
- Select from the following "external" connectors:
 - Die-Cast Squeeze Type Connector w/Set Screw and Lock Nut
 - Die-Cast Snap-in Connector w/Set Screw
 - Phenolic (Plastic and Steel) Snap-in Connector
- Custom color configurations available

SPECIFICATIONS

- Meets the requirements of the 2026 National Electrical Code: Articles 300.3(B) (2), (C)(1), Section 725.136(I)(1), and 725.139(A) through (D)(1) and California Title 24 Lighting Controls, Articles 130.1(A)(B)(C)(D)(E).

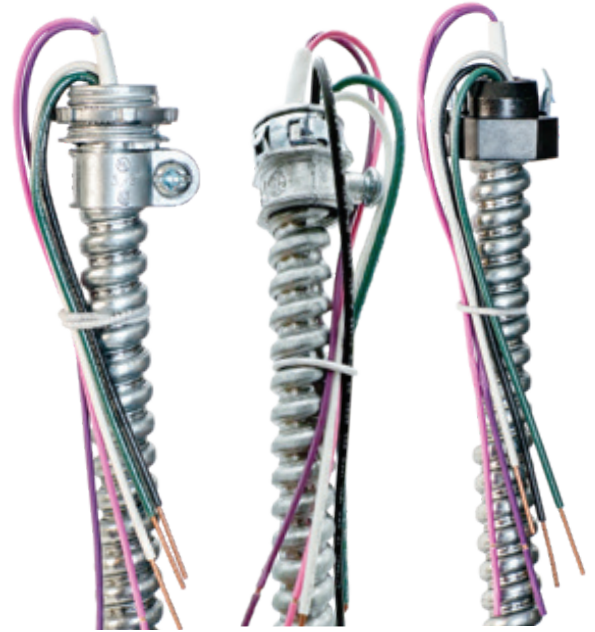

Die-Cast Squeeze-Type Connector with Set Screw and Lock Nut

Die-Cast Snap-In Connector with Set Screw

Plastic/Steel Snap-In Connector




Please scan the QR code to access our Fixture Whip Part Number Generator. Questions? Email inside sales at sales@engproducts.com.



Prefabricated Whips

Standard Fixture Whips

- Factory prefabricated wiring assemblies typically used for lighting and power distribution in commercial buildings.
- Ready to use right out of the box.
- Available in 3/8" and 1/2" trade sizes with conductors stripped 5/8".
- Available in stranded or solid wire, and with die-cast screw-in lock-nut, die-cast snap-in, or polycarbonate snap-in connectors.

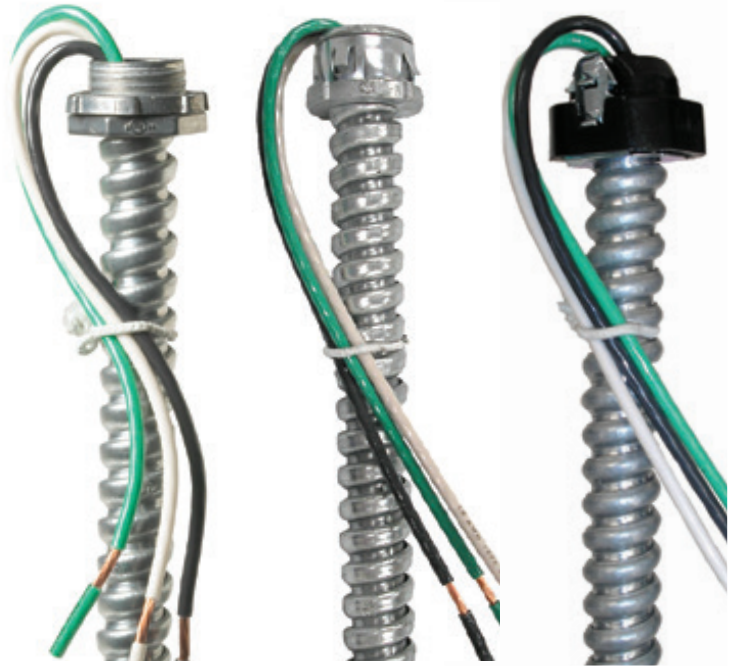

Die-Cast
Screw-In
Lock-Nut
Connector

Die-Cast
Snap-In
Connector

Polycarbonate
Snap-In
Connector

**Need a specific configuration?
We easily engineer fixture whips
for any device or system.**

QuickWhip™ Fixture Whips

- Pre-attached WAGO® connectors add speed and dependability.
- No tools required! A cost effective solution that eliminates lock nuts and wire nuts.
- Available in stranded or solid wire, with die-cast snap-in connectors.




QuickWhip with Die-Cast
Snap-In Connector

**Average Time Savings:
45% or up to three (3) minutes
per luminaire installation.**



Fixture Whip Ordering Guide

Quantity of Whips Needed?						
Wire Conductor Type (select one):				Solid	Stranded	
Wire Conductor Gauge Size: (select one):			12 AWG	14 AWG	16 AWG	18 AWG
Wire Conductor Colors (select):	Black	White	Red	Green	Blue	Gray
	Brown	Purple	Pink	Orange	Yellow	Other:
Wire Conductor Lead Length (select one):				6 in	12 in	Other:
Conduit Size (select one):				3/8 Inch	1/2 inch	3/4 inch
Conduit Length (select one):		6-ft.	8-ft.	10-ft.	12-ft.	Other:
Illumination Control/Dimming - 1/2 inch available only (select one):					Yes	No
Insulated Throat (select one):					Yes	No
Connector Type (See reference guide below)						
WAGO® Connectors (Select wire color and which end requires the WAGO Connector):						
	Color:	Left []	Right []	Color:	Left []	Right []
	Color:	Left []	Right []	Color:	Left []	Right []
	Color:	Left []	Right []	Color:	Left []	Right []

WAGO® is a registered Trademark of WAGO Kontakttechnik GmbH & Co. KG - All Rights Reserved.

	1 Standard Screw-In Die-Cast (Internal)			6 Standard Screw-In Steel (External)	
	3/8": P/N E00-001-000	1/2": P/N E00-026-000		3/8": P/N E00-041-002	1/2": P/N E00-042-002
	Type: Screw-in/Lock Nut	Material: Die-Cast		Type: Squeeze/Lock Nut	Material: Steel
Insulated: Yes or No (circle one)		Standard connector	Insulated: 3/8" - NO 1/2" - YES		QS (inserted at end of P/N)
	2 Standard Snap-In Die-Cast (Internal)			7 Squeeze Type w/ Lock Nut & Set Screw Die-Cast (External)	
	3/8": P/N E00-003-000	1/2": P/N E00-005-000		3/8": P/N TB 3110	1/2": P/N 112-001-007
	Type: Screw-in/Snap-in	Material: Die-Cast		Type: Squeeze/Lock Nut	Material: Steel
		AD - both 3/8" & 1/2" conduit	Insulated: Yes		3110 - 3/8"; 3112 - 1/2"
	3 Standard Snap-In Die-Cast (External)			8 90° Connector with Lock Nut & Set Screw Die-Cast (External) Standard Snap-In Die-Cast (External)	
	3/8": P/N E00-003-001			3/8": P/N E00-007-000	
	Type: Set Screw/Snap-in	Material: Die-Cast		Type: Screw-in/Snap-in	Material: Die-Cast
Insulated: No		ADEX	Insulated: Yes or No (circle one)		IRA - 3/8" only
	4 Standard Screw-In Die-Cast (External)			9 90° Connector Snap-in with Set Screw Die-Cast (External)	
	3/8": P/N E00-041-000	1/2": P/N E00-042-000		3/8": P/N E00-015-000	1/2": P/N E00-005-001
	Type: Squeeze/LockNut	Material: Die-Cast		Type: Set Screw/Snap-in 90°	Material: Die-Cast
Insulated: No		EX - both 3/8" & 1/2" conduit	Insulated: No		AD-IRA - 3/8"; AD-1/2-IRA - 1/2"
	5 Standard Snap-In Phenolic with Steel (External)			10 Speed Lock with Internal Throat & Set Screw Steel (External)	
	3/8": P/N E00-002-000			3/8": P/N E00-002-002	1/2": P/N E00-005-002
	Type: Exterior/Snap-in	Material: Plastic w/ Steel		Type: Speed Lock Style/Snap-in	Material: Steel
Insulated: Yes		A - 3/8" conduit	Insulated: Yes		V - for both 3/8" & 1/2" conduit

Prefabricated Whips




Metal Clad (MC) Whips

EPCO's aluminum armor MC whips are pre-assembled for quick and easy installation, saving valuable time on-site. They are ideal for lighting installations, wall whips, longer lighting runs, and extensive power distribution in larger buildings. Metal cladding provides superior protection ideal for rough environments prone to damage.

Contact EPCO directly for custom MC Fixture whip capabilities.



Metal Clad (MC) Fixture Whips					
Item Part #	Description	Unit Qty	Barrel Qty	Min Order Qty	Ship Wt. (Lbs)
MCWA-12/2SOL-8	Aluminum armor MC whip: 8-ft., 12/2 Solid, Black, White, Green, Die-cast Snap-in Connector	1	75	10	91
MCWA-12/2SOL-10	Aluminum armor MC whip: 10-ft., 12/2 Solid, Black, White, Green, Die-cast Snap-in Connector	1	60	10	89
MCWA-12/2SOL-12	Aluminum armor MC whip: 12-ft., 12/2 Solid, Black, White, Green, Die-cast Snap-in Connector	1	50	10	87
MCWA-12/2SOL-15	Aluminum armor MC whip: 15-ft., 12/2 Solid, Black, White, Green, Die-cast Snap-in Connector	1	40	10	85
MCWA-12/2SOL-20	Aluminum armor AC whip: 20-ft., 12/2 Solid, Black, White, Green, Die-cast Snap-in Connector	1	30	10	83

Air Conditioner and Power Equipment Whips

EPCO's prefabricated air conditioner whips and power equipment whips are ideal for use with electrical equipment where flexibility and protection from liquids, vapors, or solid materials is required for operations in damp or wet environments.



Air Conditioner Whip with Non-Metallic Connectors



Air Conditioner Whip with Metallic Connectors



Power Equipment Whip

Air Conditioner Whips

Item Part #	Description	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)
ACWNM1043-1RA	4-ft., 1/2", 3-10 AWG, Red, Black, Green	1	6	1	9
ACWNM1063-1RA	6-ft., 1/2", 3-10 AWG, Red, Black, Green	1	6	1	12
ACWNM843-1RA	4-ft., 3/4", 2-8 AWG, Red, Black; 1-10 AWG, Green	1	6	1	13
ACWNM863-1RA	6-ft., 3/4", 2-8 AWG, Red, Black; 1-10 AWG, Green	1	6	1	16
ACWNM843-1RA-1/2	4-ft., 1/2", 2-8 AWG, Red, Black; 1-10 AWG, Green	1	6	1	11
ACWNM863-1RA-1/2	6-ft., 1/2", 2-8 AWG, Red, Black; 1-10 AWG, Green	1	6	1	14

Air Conditioner Whips with Metal Connectors

ACWNMD1043-1RA	4-ft., 1/2", 3-10 AWG, Red, Black, Green, Metal connectors	1	6	1	9
ACWNMD1063-1RA	6-ft., 1/2", 3-10 AWG, Red, Black, Green, Metal connectors	1	6	1	12
ACWNMD843-1RA	4-ft., 3/4", 2-8 AWG, Red, Black, 1-10 AWG Green, Metal connectors	1	6	1	13
ACWNMD863-1RA	6-ft., 3/4", 2-8 AWG, Red, Black, 1-10 AWG Green, Metal connectors	1	6	1	16

Power Equipment Whips

PEWNM1263-1RA	6-ft., 1/2", 3-12 AWG, Red, Black, Green	1	20	1	34
PEWNM1243-1RA	4-ft., 1/2", 3-12 AWG, Red, Black, Green	1	20	1	23
PEWNM1264-1RA	6-ft., 1/2", 4-12 AWG, Red, Black, Green, White	1	20	1	36
PEWNM1244-1RA	4-ft., 1/2", 4-12 AWG, Red, Black, Green, White	1	20	1	25



Temporary Power

EPCO Temp Power Block

The EPCO Power Block is here to revolutionize your job site. This robust 50-amp temporary power box delivers dependable power safely and efficiently. Get the ultimate solution for portable power distribution that's built to last.



**Temp Power Block
Part Number 10960**

FEATURES

- Replaceable components: Breakers & GFCI receptacles.
- Durable and weather resistant NEMA 3R rated construction.
- Multiple mounting options with roll-cage handles.
- Engineered for high-performance temporary power distribution.

SPECIFICATIONS

Electrical

- California Style Twist Lock 125/250VAC, Single-Phase, 60 Hz, 50A Input/50A Output
- USB Type A & C - 2A Power Port
- 50A Inlet - CS6375
- 50A Outlet - CS6369
- 30A Protected Outlet - NEMA L6-30
- 30A 2-Pole Breaker
- (6) 20A Protected GFCI Outlets - NEMA 5-20
- (6) 20A 1-Pole Breakers

Environmental

- -20 to 104F [-20 to 40C]

Safety

- NEMA Type 3R
- cETLus Listed - UL 1640
- Complies with OSHA standards

Mechanical

- 16-gauge steel construction with paint finish
- 26 x 17 x 13in. [64.8 x 43.2 x 33.0cm]
- 42 lb. [19 kg]



**California Style Twist Lock
50A Inlet, 125/250V, 50/60Hz
Inlet & Outlet**

Temp Power Block Replaceable Components

Downtime due to a failed power block means lost productivity, but EPCO eliminates the costly waiting game with our field-replaceable Temp Power Block components. These rugged replacement parts allow your certified electrician to quickly service and restore power right on the job site. Keep the current flowing and the job running smoothly by having these vital components on hand.




Replaceable Circuit Breakers

L6-30 Twist Lock Receptacle



20A Duplex NEMA 5-20R GFCI Receptacles and 2A USB Type A & C Power Ports

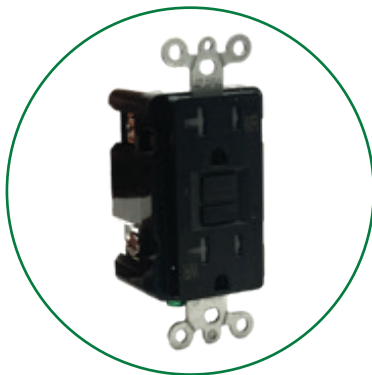

**Replacement Receptacle
Part Number 10963**



**Replacement Breaker
Part Number 10964**



**Temp Power Lid Replacement
Part Number 10960-LID**

Temp Power Block and Replacement Components

Item Part #	Description	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
10960	Temp Power Block, 50A, 125/250V, (6) 20A Duplex 5-20R	1	1	1	42	1yr
10960-LID	Lid, Temp Power Replacement Part	1	1	1	7	1yr
10963	Receptacle, 20A Duplex 5-20R WR Black	1	12	1	4 (case)	1yr
10964	Breaker, 1P/20A 120/240V 10KAIC Plug-In	1	12	1	5 (case)	1yr



Temporary Power

Temp Power Block Power Cords

50A Cords offered in both 50- and 100-ft. lengths are heavy duty, rugged power cords ready for any job site. Temporary power cords are essential components in any portable power distribution setup. They serve as the lifeline between your power source and the equipment or distribution box, ensuring safe and efficient energy transfer across varying distances and conditions.

AVAILABLE POWER CORDS:

- 50-ft. 50A Cord - Ideal for mid-range connections.
- 100-ft. 50A Cord - Perfect for extended reach without compromising power delivery.
- Both power cords come with California style twist lock with CS6365C plug and CS6364C connector.




**Temp Power Cord, 50-ft.
Part Number 10961**












**SEOW Power Cord
Connectors**

Power Cords						
Item Part #	Description	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
10961	Temp Power Cord, 50A, 50Ft., SEOW CS	1	1	1	31	1 yr
10962	Temp Power Cord, 50A, 100Ft., SEOW CS	1	1	1	61	1 yr










Temporary Lighting

TIGER™ XL Temporary LED Luminaire






	Item Part #	Cord	Wire AWG	Input Voltage	Watt	Lumen Output	Color Temp	Application	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	15738	35-ft. SJTW	16/3	Hardwired 120-277V	100W	15,000	5000K	Dry/damp Locations	1	4	4	19	5 yr
	15739	35-ft. SJTW	14/3	Hardwired 120-277V	150W	22,500	5000K	Dry/damp Locations	1	4	4	22	5 yr
	15748	35-ft. SJTW	16/3	Hardwired 120-277V	100W	15,000	5000K	Wet Locations	1	4	4	22	5 yr
	<ul style="list-style-type: none"> • Primary power: 1-ft., pre-stripped pigtail hard-wired directly into 120-277V circuit. • Secondary power: 35-ft. power cord connects up to 3 additional TIGER XL luminaires. • Maximum daisy chain is 4 units on 120V or 7 units on 277V for all units. • Snap-lock hang hook for easy installation - P/N 15748 • Stainless steel carabiner included - P/N 15738, P/N 15739 								    				






TIGERcub™ Temporary LED Luminaire

	Item Part #	Cord	Wire AWG	Input Voltage	Watt	Lumen Output	Color Temp	Application	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	15722	5-ft. SJTW	18	120V	100W	15,000	5000K	Dry/damp Locations	1	4	4	6	5 yr
	15723	5-ft. SJTW	18	120V	150W	22,500	5000K	Dry/damp Locations	1	4	4	7	5 yr
	<ul style="list-style-type: none"> • Meets OSHA Compliance Standard 1926.56(a) for temporary lighting: 30-ft. spacing for minimum of 5-ft.-candles. • Stainless steel carabiner for easy installation. 								    				

Temporary Lighting

TIGRESS™ Prefab Temporary LED Light Fixture

	Item Part #	Input Voltage	Cord (12 AWG)	Lumen Output	Color Temp	Application	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
TIGRESS PREFAB 100W FIXTURES											
	15742	120-277V	NO CORD*	15,000	5000K	Dry/damp Locations	1	4	1	4	5 yr
	15742-12A1-P1R1	120V	1-ft. 5-15P & 1-ft. 5-15R	15,000	5000K	Dry/damp Locations	1	4	1	5	5 yr
	15742-12A1-P6R1	120V	6-ft. 5-15P & 1-ft. 5-15R	15,000	5000K	Dry/damp Locations	1	4	1	6	5 yr
	15742-12A1-P25R1	120V	25-ft. 5-15P & 1-ft. 5-15R	15,000	5000K	Dry/damp Locations	1	4	1	8	5 yr
	15742-12A1-P35R1	120V	35-ft. 5-15P & 1-ft. 5-15R	15,000	5000K	Dry/damp Locations	1	4	1	10	5 yr

TIGRESS PREFAB 150W FIXTURES											
	15743	120-277V	NO CORD*	22,500	5000K	Dry/damp Locations	1	4	1	4	5 yr
	15743-12A1-P1R1	120V	1-ft. 5-15P & 1-ft. 5-15R	22,500	5000K	Dry/damp Locations	1	4	1	6	5 yr
	15743-12A1-P6R1	120V	6-ft. 5-15P & 1ft. 5-15R	22,500	5000K	Dry/damp Locations	1	4	1	7	5 yr
	15743-12A1-P25R1	120V	25-ft. 5-15P & 1-ft. 5-15R	22,500	5000K	Dry/damp Locations	1	4	1	9	5 yr
	15743-12A1-P35R1	120V	35-ft. 5-15P & 1-ft. 5-15R	22,500	5000K	Dry/damp Locations	1	4	1	11	5 yr

- *Compatible with JS Cord, NM-B cable, MC cable, & FMC whips when used with suitable connector.
- 3-conductor lever nut connectors.
- 1/2" Trade size knockouts.
- Stainless steel carabiner.



3-conductor lever nut connectors



Shown with Junior Service Cord



Shown with NM-B cable



Shown with FMC








Temporary Lighting

TIGRESS™ Multi-Lamp Customizable Light Fixture

	Item Part #	Cord Length	Wire Gauge	Wire Type	Input Voltage	Lumen Output	Color Temp	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	15721	-	-	-	120-277V	N/A	5000K	1	1	1	6	1yr
	15721-10K5	-	-	-	120-277V	10,000 Lumen Output	5000K	1	1	1	6	1yr
	15721-10K5-PC6	6-ft.	16/3	SJT	120-277V	10,000 Lumen Output	5000K	1	1	1	9	1yr
<ul style="list-style-type: none"> • Pre-installed snap-lock hang hook. • Available with or without LED corn cob lamp and with or without power cord. • Durable steel housing includes 11-gauge wire safety cage. • Four (4) 1/2" trade size knockouts. • Accommodates any E39 mogul-base self ballasted lamp. 									   			

LED CordLights™

Install Time 7 Minutes!






	Item Part #	Cord	Wire Gauge	Input Voltage	Lumen Output	Color Temp	Application	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
 	16140	100-ft. SJTW, 1-15 P&R	18/2	120V	16,000 Standard Output	5000K	Damp or wet Locations	1	2	1	9	3yr
	16143	100-ft. SJTW, 5-15 P&R	18/3	120V	16,000 Standard Output	5000K	Damp or wet Locations	1	2	1	9	3yr
	16145	50-ft. STJW 1-15 P&R	18/2	120V	8,000 Standard Output	5000K	Damp or wet Locations	1	4	1	5	3yr
<ul style="list-style-type: none"> • 10-ft. spacing between LED Modules, 5 on 50-ft., 10 on 100-ft. • Daisy chain allowance: <ul style="list-style-type: none"> • P/N 16140, P/N 16143 - up to 4 units. • P/N 16145 - 8 units. • Stainless steel carabiner. • 120° beam angle. • Replacement fuse - Bussmann Series, product code GMA-8-R. 									    			

Temporary Lighting

Economy CordLights™										
	Item Part #	Cord	Wire Gauge	Watt / Lumen Output / Color Temp	Application	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	16400	100-ft. SJTW	14/2	Snap-on plastic cages, Lamps NOT included	Indoor/outdoor use.	1	1	1	12	1 yr
	16410	100-ft. SJTW	14/2	12W / 1,100 / 5000K	Indoor/outdoor use.	1	1	1	13	1 yr
	16453	100-ft. SJTW	12/3	Snap-on plastic cages, Lamps NOT included	Indoor/outdoor use	1	1	1	17	1 yr
	16454	100-ft. SJTW	14/3	Snap-on plastic cages, Lamps NOT included	Indoor/outdoor use	1	1	1	13	1 yr
	16104	Replacement cage			Indoor/outdoor use.	1	10	10	2	N/A
<ul style="list-style-type: none"> • P/N 16410 comes with A19 LED bulbs. • P/N 16400, 16453, 16454: Compatible with LED, CFL, and incandescent bulbs, Snap-on plastic cage, 10 sockets and cages, with 10-ft. spacing between cages. 										

Temporary Lighting

CordLight™ Accessories

	Item Part #	Description	Additional Notes	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)
	16024	Single Lamp Light Kit: No Lamp	Snap-on cage, pre-cut 7" conductors and pre-attached WAGO® connectors.	1	12	1	5
	16025	Single Lamp Light Kit: Includes LED Lamp	Snap-on cage, 8.5W, 800 Lumens, 2700K, pre-cut 7" conductors and pre-attached WAGO® connectors.	1	12	1	5
	16022	Insulation Piercing Lamp Socket 12 or 14-gauge stranded wire	No cutting, stripping, wire nuts, or soldering required.	5	25	5	1
	16023	PigTail Lamp Socket: 6" leads, pre-stripped 5/8". Snap-off, snap-on lamp socket fitting	Indoor/outdoor use.	5	25	5	1
	16100	Safety cage for Deluxe CordLights (yellow) P/N 16010 and PigTail Lamp Socket P/N 16023	Compatible with Part Numbers 16010 and 16023.	1	10	10	2
	16110	Safety cage for Insulation Piercing Lamp Socket (yellow)	Compatible with Part Number 16022.	1	10	10	2
<ul style="list-style-type: none"> • Suitable for indoor and damp Locations. • P/N 16022 & 16023: Recommended use with A21 LED lamp or A23 incandescent lamp (150W max) • Typical applications: Construction sites, parking lots, walkways. 							

Utility Lighting

EPCO's energy-efficient and cost-effective Utility Luminaires meet the requirements for a variety of lighting applications, approved for use in damp and wet locations.

Complete LED Fixtures:



ProSeries Junior
LED Luminaire
P/N 15982 (Single)
P/N 15982B (Bulk*)



ProSeries LED
Utility Luminaire
P/N 15913 (Single)
P/N 15915 (Bulk*)

Complete Medium Base (E26) Fixtures:



Utility Light Fixture
P/N 15000 (Single)
P/N 15000B (Bulk**)



ProSeries Utility
Light Fixture
P/N 15800 (Single)
P/N 15800B (Bulk*)

Bulk Quantities:
* = 12/case
** = 24/case

Retrofit with Modular Utility Lighting Components:

Retrofit your Jelly Jar fixture - Add a silicone gasket, junction box adapter, and ProSeries LED Utility Luminaire Retrofit P/N 15973.



Modular Utility Lighting

Configuration Options

EPCO's Modular Utility Lighting offers ease and flexibility to mix and match light engines, junction boxes and accessories to create the best solution for your lighting needs.



Match the **yellow** or **green** light engine with the corresponding colored junction box.

1 Choose Light Engine:



ProSeries LED
P/N 15922S (Single)
P/N 15922B (Bulk*)



ProSeries Junior LED Utility Lamp
P/N 15980 (Single)
P/N 15980B (Bulk*)



ProSeries LED Utility Luminaire Upgrade
P/N 15973 (Single)
P/N 15975 (Bulk*)



ProSeries Junior LED Luminaire Upgrade
P/N 15981 (single)
P/N 15981B (Bulk*)

2 Choose Junction Box:



Octi-Junction Box
3/4" Glue-In Hubs
P/N 15258



SpiderBox
1/2" Glue-In Hubs
P/N 15245



SpiderBox
3/4" Glue-In Hubs
P/N 15248



12 Cubic Inch Standard Non-Metallic
1/2" & 3/4" Knock Outs
P/N 15045



SpiderBox
1/2" or 3/4" Knock Outs
P/N 15246 or 15247

3 Optional Accessories:



Octi-Junction Box Cover & Neoprene Gasket Kit
P/N 15906



Standard Glass Globe
P/N 15015










Octi-Junction Box Cover w/ Porcelain Lamp Holder
P/N 15815










Round Junction Box Cover & Neoprene Gasket Kit
P/N 15905






Utility Lighting






Complete LED Fixtures

ProSeries™ LED Utility Luminaire												
	Item Part #	Description	Input Voltage	Watt	Lumen Output	Color Temp	Application	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	15913	ProSeries LED utility luminaire	120V	14W	1,500	5000K	Dry/damp/wet Locations.	1	12	1	2	5 yr
	15915 (BULK)	ProSeries LED utility luminaire	120V	14W	1,500	5000K	Dry/damp/wet Locations.	1	12	12	17	5 yr
<ul style="list-style-type: none"> ProSeries LED Utility luminaires include aluminum heat sink & 18 cubic inch PBT junction box. Will not rust or corrode. Dimmable. 							     					

ProSeries™ Junior LED Utility Luminaire												
	Item Part #	Description	Input Voltage	Watt	Lumen Output	Color Temp	Application	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	15982	ProSeries junior LED utility luminaire	120-277V	14W	1,440	5000K	Dry/damp/wet Locations.	1	12	1	2	5 yr
	15982B (BULK)	ProSeries junior LED utility luminaire (BULK)	120-277V	14W	1,440	5000K	Dry/damp/wet Locations.	1	12	12	15	5 yr
ProSeries Junior LED Utility luminaires: <ul style="list-style-type: none"> A direct replacement for the jelly jar fixture. Includes E26 socket connector for fast and easy installation. 							     					



Complete Medium Base (E26) Fixtures



Utility Light Medium Base (E26) Light Fixture										
	Item Part #	Description	Max. Lamp Wattage	Junction Box	Application	Unit Qty	Total Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	15000	Utility light fixture, standard glass globe, 1/2" and 3/4" knockout combo	150W	12 cubic inch phenolic junction box.	Dry or damp Locations.	1	12	1	24	1 yr
	15000B (BULK)	Utility light fixture, standard glass globe, 1/2 and 3/4" knockout combo (BULK)	150W	12 cubic inch phenolic junction box.	Dry or damp Locations.	1	24	24	48	1 yr
<ul style="list-style-type: none"> • Heavy-duty construction. • Will not rust or corrode. 						   				



ProSeries™ Medium Base (E26) Light Fixtures										
	Item Part #	Description	Max. Lamp Wattage	Junction Box	Application	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	15800	ProSeries utility light fixture, standard glass globe	150W	18 cubic inch PBT Octi-Junction Box	Lightweight construction. Will not rust or corrode.	1	12	1	3	1 yr
	15800B (BULK)	ProSeries utility light fixture, standard glass globe (BULK)	150W	18 cubic inch PBT Octi-Junction Box	Lightweight construction. Will not rust or corrode.	1	12	12	38	1 yr
<ul style="list-style-type: none"> • Lightweight construction. • Will not rust or corrode. • Octi-junction box includes (2) 1/2" and two (2) 3/4" trade size knockouts. 						   				

Utility Lighting

Utility Luminaire Retrofits








ProSeries™ LED Utility Luminaire Retrofit												
	Item Part #	Description	Input Voltage	Watt	Lumen Output	Color Temp	Application	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	15973	LED Retrofit	120V	14W	1,500	5000K	Dry/damp/wet Locations.	1	12	1	1	5 yr
	15975 (BULK)	LED Retrofit	120V	14W	1,500	5000K	Dry/damp/wet Locations.	12	12	12	14	5 yr
<ul style="list-style-type: none"> Will not rust or corrode. Dimmable. Direct replacement for outdated or damaged fixture bases. 												

ProSeries™ Junior LED Utility Luminaire Retrofit												
	Item Part #	Description	Input Voltage	Watt	Lumen Output	Color Temp	Application	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	15981	ProSeries junior LED utility luminaire Retrofit	120-277V	14W	1,440	5000K	Dry/damp/wet Locations.	1	12	1	1	5 yr
	15981B (BULK)	ProSeries junior LED utility luminaire Retrofit (BULK)	120-277V	14W	1,440	5000K	Dry/damp/wet Locations.	12	12	12	13	5 yr
LED Utility Luminaire Retrofit: <ul style="list-style-type: none"> A direct hard-wire replacement for light fixture bases that have been in service longer than 5 yrs. Direct replacement for outdated or damaged fixture bases. 												




Medium Base (E26) Utility Light Fixtures									
	Item Part #	Description	Junction Box	Application	Unit Qty	Total Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	15050	Utility light fixture, standard glass globe	No junction box.	Dry/damp Locations.	1	12	1	2	1 yr
	15050B (BULK)	Utility light fixture, standard glass globe (BULK)	No junction box.	Dry/damp Locations.	1	24	24	22	1 yr
<ul style="list-style-type: none"> Heavy-duty construction. Will not rust or corrode. Direct replacement for outdated or damaged fixture bases. 									

Utility Luminaire LED Light Engines

ProSeries™ LED







	Item Part #	Description	Input Voltage	Watt	Lumen Output	Color Temp	Application	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	15922S	ProSeries LED Light Engine	120V	14W	1,500	5000K	Dry/damp/wet locations.	1	1	1	2	5 yr
	15922B (BULK)	ProSeries LED Light Engine (Bulk)	120V	14W	1,500	5000K	Dry/damp/wet locations.	12	12	12	25	5 yr
<ul style="list-style-type: none"> Will not rust or corrode. Dimmable. 							     					



ProSeries™ Junior LED






	Item Part #	Description	Input Voltage	Watt	Lumen Output	Color Temp	Application	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	15980	ProSeries Junior LED Light Engine (single)	120-277V	14W	1,440	5000K	Dry/Damp/Wet Locations.	1	12	1	1	5 yr
	15980B	ProSeries Junior LED Light Engine (bulk)	120-277V	14W	1,440	5000K	Dry/Damp/Wet Locations.	1	12	12	13	5 yr
<ul style="list-style-type: none"> Direct replacement for a jelly jar globe and incandescent lamp. Includes E26 socket connector. Includes E26 Socket Connector for fast and easy installation. 										 		





Utility Lighting

Junction Boxes






Standard Non-Metallic Junction Boxes							
	Item Part #	Description	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	15045	12 cubic inch, 1/2" and 3/4" knockout combo	1	12	12	7	1 yr
	15046	12 cubic inch, 1/2" knockouts	1	12	12	7	1 yr
	15047	12 cubic inch, 3/4" knockouts	1	12	12	7	1 yr
					  		

SPIDERBOX Non-Metallic Junction Boxes							
	Item Part #	Description	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	15246	12 cubic inch, 1/2" knockouts	1	12	12	8	1 yr
	15247	12 cubic inch, 3/4" knockouts	1	12	12	8	1 yr







SPIDERBOX Non-Metallic with Glue-in Hubs							
	Item Part #	Description	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	15245	12 cubic inch, four (4) 1/2" glue-in hubs - two (2) open and two (2) closed	1	24	24	11	1 yr
	15248	12 cubic inch, four (4) 3/4" glue-in hubs - two (2) open and two (2) closed	1	24	24	11	1 yr
					  		

Octi-Junction Box with Glue-In Hubs							
	Item Part #	Description	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)	Warranty
	15258	16 cubic inch, four (4) 3/4" glue-in hubs - two (2) open and two (2) closed	1	24	24	13	1 yr
					  		

Optional Accessories

Utility Lighting Optional Accessories							
	Item Part #	Description	Application	Unit Qty	Case Qty	Min Order Qty	Ship Wt. (Lbs)
	15015	Standard Glass Globe	For use with A19 100-Watt Incandescent Lamp or A19 LED Lamp	1	32	24	34
	15090	Medium Base, no globe	For use with EPCO non-metallic 12 cubic inch junction boxes	1	12	1	1
	15815	Octi-Junction Box Cover with Porcelain Lamp Holder	For use with EPCO Octi-Box junction boxes	1	12	1	1
	15905	Round Junction Box Cover and Neoprene Gasket Kit	For use with EPCO non-metallic 12 cubic inch junction boxes	1	12	12	2
	15906	Octi-Box Cover, with Gasket	For use with EPCO Octi-Box junction boxes	1	12	12	3

Lamp Holders

	Item Part #	Description	Unit Qty	Case Qty	Min Order Qty	Ship Wt (Lbs)	Warranty
Porcelain Lamp Holders							
	16500	Porcelain, Keyless, 4-Terminal	1	48	48	33	1 yr
	16502	Porcelain, Pull Chain	1	48	48	35	1 yr
	16514	Porcelain, Pull Chain, 15 AMP Receptacle	1	48	48	40	1 yr
	16520	Porcelain, Keyless, 4-Terminal, 7" Black and White Conductors	1	48	48	33	1 yr
Accessories							
	16100	Safety Cage, Yellow	1	10	10	1	1 yr
	16501	Safety Cage, Metal	1	12	12	6	1 yr
<ul style="list-style-type: none"> Nickel-plated E26 brass screw shell will not corrode. Includes corrosion resistant mounting screws. All lamp holders are UL Listed (except P/N 16514). 			<ul style="list-style-type: none"> Fits 3.25" or 4.0" junction box. UV Resistant - will not fade or discolor 				

Landscape Light Posts

Landscape LightPost™, SplicePost™, and Receptacle Post Fixture Fittings

- Fixture fitting replaces EMT, conduit connectors and weatherproof boxes.
- Ready to install — no assembly required.
- Shatter, corrosion and UV resistant.
- Angled bottom allows UF cable or metallic conduit to enter at different depths to eliminate installation congestion.
- Slanted top virtually eliminates water pooling or leaking into the interior of the LightPost, SplicePost, or Receptacle Post.
- The Uni-Stabilizer™ provides solid in-ground support helping resist against ground movement typically caused by ground freezing and thawing.

Landscape SplicePost and Receptacle Post

- Features a separator disk and SpliceCap to create an integral junction box suitable for splicing.
- The PVC SpliceCap is non-metallic and suitable for the majority of outdoor light fixtures on the market.
- Landscape Receptacle Post features an internal wiring compartment/ junction box, rated for 19 cubic inches that easily accommodates two (2) 20 AMP circuits.
- Receptacle Post only: For use with 120V GFCI receptacles and NEMA type 3R weatherproof receptacle cover, when in use.

NOTE: Receptacles and cover not included.

Specifications

- Outside diameter: 3"
- Applications: damp or wet environments
- Luminaire or light fixture application: Should always be used with a UL Listed luminaire or light fixture that includes a grounding means suitable for use in wet locations. Any mounted luminaire or light fixture should not exceed 12 lbs. or 12" in height.



**Landscape
LightPost**

**Part Number:
LLPN25B**

**Landscape
SplicePost**


**Part Number:
LSPB**



**Landscape
Receptacle Post**

**Part Number:
LSPB-RECEP**

Landscape Light Posts

Item Part #	Description	Unit Qty	Case Qty	Min Order Qty	Ship Wt (Lbs)	Warranty
Landscape LightPost						
LLPN25B	Landscape LightPost, includes cap	1	9	9	21	1 yr
E04-002-004	Landscape LightPost Replacement Cap	1	12	12	1	1 yr
Landscape SplicePost and Receptacle Post						
LSPB	Landscape SplicePost, includes cap	1	9	9	21	1 yr
LSPB-RECEP	Landscape Receptacle Post, Black, includes cap	1	9	9	21	1 yr
17230	Landscape SplicePost & Receptacle Post Replacement Cap	1	12	12	1	1 yr
						



Landscape SplicePost & Receptacle Post Cap

**Part Number:
17230**



Splice Kits & Heat Shrink Tubing

UF Cable Splice Kit

The UF Cable Splice Kit includes:


- One (1) 4-position mechanical connector
- One (1) piece of heat shrink tubing to splice and insulate 14 AWG to 8 AWG UF cable.

By using the thick wall heat shrink tubing with sealant and the mechanical connector, the repair of UF Cable is a quick, easy and reliable process. No epoxies, tape or separate mastics are required.



- UL Listed for direct burial. File number: E123896.
- Obsoletes messy, two part splice kits.
- Accommodates UF cables sizes: 14/3 without ground minimum, 8/3 without ground maximum.
- 600 Volts maximum, 221°F (105°C) temperature rating.

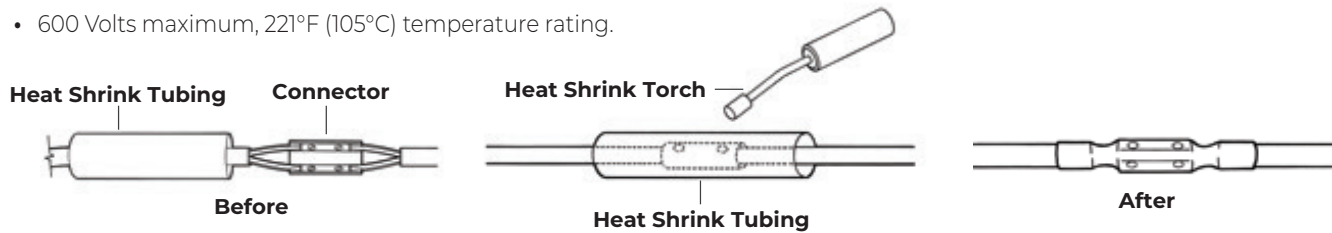

**Part Number:
UFC2B**



Item Part #	Description	Unit Qty	Unit Pkg	TL Case Qty	Min Order Qty	Ship Wt (Lbs)
UFC2B	Accommodates cable sizes 14/3 to 8/3 maximum	1	BAG	24	1	2

UF Stretcher Kit

Simplify UF cable repairs after a trencher or backhoe has damaged or destroyed a 7" to 10" section of UF cable. Utilize our thick wall heat shrink tubing with sealant to make a quick and reliable repair. Eliminates epoxies, tapes or separate mastics and creates a waterproof splice.

The UF Stretcher Kit includes:


- One (1) 4-position 11.5" connector
- One (1) piece of heat shrink tubing

Designed to splice and insulate 14 AWG to 8 AWG UF cable.



- UL Listed for direct burial. File Number: E123896.
- 600 Volts maximum, 221°F (105°C) temperature rating.

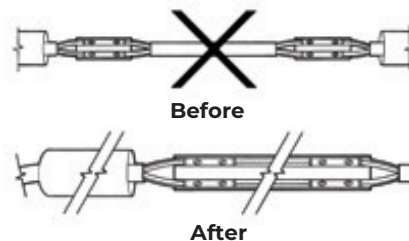

**Part Number:
UFS2**



Item Part Number	Description	Unit Qty	Unit Pkg	TL Case Qty	Min Order Qty	Ship Wt (Lbs)
UFS2	Accommodates cable sizes 14/3 to 8/3 maximum	1	BAG	24	1	3

Splice Kits & Heat Shrink Tubing

Dual Rated Butt Splice Kits


Although crimping is the most commonly used method of wire splicing and termination, our dual rated butt splice kits eliminate expensive crimping tools when splicing aluminum or copper conductors for direct burial.

Dual Rated Butt Splice Kits include:

- A pair of thick wall heat shrink tubing (2 pieces)
- One (1) mechanical connector.
- Popular splicing applications include repair and/or extending type USE cable.
- UL Listed components.
- 600 Volts maximum, 221°F (105°C) temperature rating.
- For use with aluminum and copper conductors.



Part Number:
DRBSK

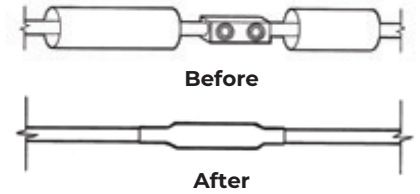

Item Part #	Description	Unit Qty	Case Qty	Min Order Qty	Ship Wt (Lbs)
DRBSK	Includes one (1) Dual Rated Connector - 4 AWG to 8 AWG; two (2) pieces of Heat Shrink Tubing	1	24	1	3
DRBSK1	Includes one (1) Dual Rated Connector - 2 AWG to 1/0 AWG; two (2) pieces of Heat Shrink Tubing	1	24	1	3
DRBSK3	Includes one (1) Dual Rated Connector - 2/0 AWG to 250 MCM; two (2) pieces of Heat Shrink Tubing	1	24	1	3



Heat Shrink Torch

Recommended only for shrinking heat shrink tubing and for use with all EPCO splice kits. The trigger-start ignition starts fast and easy. Features a fully adjustable regulator valve and air inlet port for adjustable flame settings.

- Connects directly to a standard 14.1 oz. propane tank (not included).

*Note: Not for sweating flux into copper pipe joint.



Part Number:
HST-T1

Item Part #	Description	Unit Qty	Unit Pkg	TL Case Qty	Min Order Qty	Ship Wt (Lbs)
HST-T1	Heat Shrink Torch	1	BOX	20	1	2

Splice Kits & Heat Shrink Tubing


Copper Butt Splice Kits

BSK splice kits include a copper butt splice connector and thick wall heat shrink tubing to create a fully insulated and protected butt splice.





**Part Number:
BSK1**

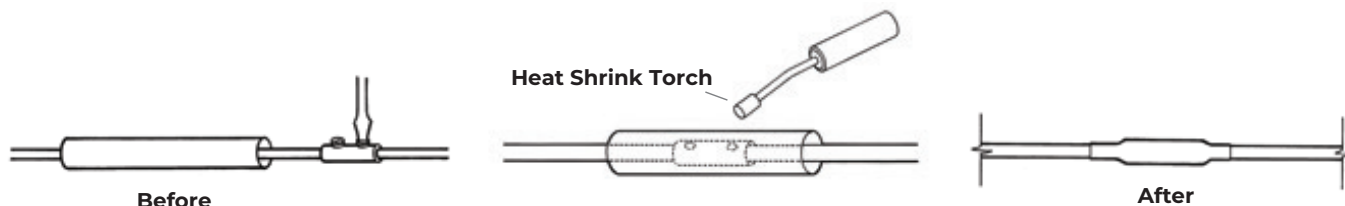- UL Listed. File number: E103228.
- Designed to simplify splicing discrete copper conductors.
- Sizes: 14 AWG to 2 AWG.
- BSK series is rated for 600 Volts maximum, 221°F (105°C) temperature rating.



Item Part #	Description	Unit Qty	Unit Pkg	TL Case Qty	Min Order Qty	Ship Wt (Lbs)
BSK1	Includes One (1) Butt Splice Connector - 8 AWG to 14 AWG; One (1) piece of Heat Shrink Tubing	1	BAG	24	1	2
BSK2	Includes Three (3) Butt Splice Connectors - 8 AWG to 14 AWG; Three (3) pieces of Heat Shrink Tubing	1	BAG	24	1	2
BSK3	Includes One (1) Butt Splice Connector - 2 AWG to 8 AWG; One (1) piece of Heat Shrink Tubing	1	BAG	24	1	2
BSK4	Includes Three (3) Butt Splice Connectors - 2 AWG to 8 AWG; Three (3) pieces of Heat Shrink Tubing	1	BAG	24	1	2

Splice Kits AWG Chart

Copper Butt Splice Kits	AWG		Dual Rated Butt Splice Kits	Logical AWG Number	AWG (and "Aught" *0 Equivalent)	MCM or kcmil
BSK1 BSK2	14		DRBSK	8	8	17
	13			7	7	21
	12			6	6	26
	11			5	5	33
	10			4	4	42
	9			2	2	66
	8	8		DRBSK1	1	1
BSK3 BSK4		7	DRBSK3	0	1/0	106
		6		-1	2/0	133
		5		-2	3/0	168
		4		-3	4/0	212
		3		-	-	250

Splice Kits & Heat Shrink Tubing

Heat Shrink Tubing

Our Heat Shrink Tubing (HST) internal coating includes an adhesive and a sealant. When the HST is heated using the Heat Shrink Torch (HST-T1), it provides a water-resistant seal to protect the mechanical splice from dirt and moisture. The standard color is black.



- Installs and shrinks easily for labor savings. Most effective when insulating over large transitions.
- 3:1 Shrink ratio accommodates larger cable size ranges.
- Excellent abrasion, corrosion and environmental resistance properties.
- UV and fungi resistant to protect the HST from surface fungus growth and obscure cable identification.
- Heat Shrink Tubing can be purchased in bulk.
- Available in pre-cut lengths from 4" to 48".
- Custom pre-cut lengths (quoted per inch) are also available.



Part Numbers:
HST300650
HST23/0
HST84
HST1410

Not Shown HST2/0300

Item Part #	Description	Unit Qty	Unit Pkg	TL Case Qty	Min Order Qty	Ship Wt (Lbs)
HST1410	Conductor Size - 14 AWG to 10 AWG, Shrink Range - .36" to .12"; Includes six (6) 8" pieces per package	6	BAG	72	6	5
HST84	Conductor Size - 6 AWG to 2 AWG, Shrink Range - .75" to .24"; Includes six (6) 8" pieces per package	6	BAG	72	6	7
HST23/0	Conductor Size - 1/0 AWG to 3/0 AWG, Shrink Range - 1.10" to .35"; Includes six (6) 8" pieces per package	6	BAG	72	6	9
HST2/0300	Conductor Size - 2/0 AWG to 350 MCM, Shrink Range - 1.50" to .47"; Includes four (4) 8" pieces per package	4	BAG	48	4	10
HST300650	Conductor Size - 250 MCM to 500 MCM, Shrink Range - 2.0" to .63"; Includes three (3) 12" pieces per package	3	BAG	36	3	13
HST-T1	Heat Shrink Torch	1	BOX	20	1	2

Splice Kits & Heat Shrink Tubing

Bulk Heat Shrink Tubing

Item Part #	Description	Unit Qty	Unit Pkg	TL Case Qty	Min Order Qty	Bulk Ship Wt (Lbs)
Conductor Size: 1/0 AWG / 3/0 AWG						
E00-901-0__	Thick Wall Tubing	1	BULK	N/A	1	1
E00-901-005	Thick Wall Tubing: One (1) 5" Piece	1	BULK	N/A	1	1
E00-901-006	Thick Wall Tubing: One (1) 6" Piece	1	BULK	N/A	1	1
E00-901-008	Thick Wall Tubing: One (1) 8" Piece	1	BULK	N/A	1	1
E00-901-009	Thick Wall Tubing: One (1) 9" Piece	1	BULK	N/A	1	1
E00-901-010	Thick Wall Tubing: One (1) 10" Piece	1	BULK	N/A	1	1
E00-901-012	Thick Wall Tubing: One (1) 12" Piece	1	BULK	N/A	1	1
E00-901-024	Thick Wall Tubing: One (1) 24" Piece	1	BULK	N/A	1	1
E00-901-036	Thick Wall Tubing: One (1) 36" Piece	1	BULK	N/A	1	1
E00-901-048	Thick Wall Tubing: One (1) 48" Piece	1	BULK	N/A	1	1
Conductor Size: 14 AWG / 10 AWG						
E00-902-0__	Thick Wall Tubing	1	BULK	N/A	1	1
E00-902-006	Thick Wall Tubing: One (1) 6" Piece	1	BULK	N/A	1	1
E00-902-008	Thick Wall Tubing: One (1) 8" Piece	1	BULK	N/A	1	1
E00-902-009	Thick Wall Tubing: One (1) 9" Piece	1	BULK	N/A	1	1
E00-902-012	Thick Wall Tubing: One (1) 12" Piece	1	BULK	N/A	1	1
E00-902-024	Thick Wall Tubing: One (1) 24" Piece	1	BULK	N/A	1	1
E00-902-048	Thick Wall Tubing: One (1) 48" Piece	1	BULK	N/A	1	1
Conductor Size: 6 AWG / 2 AWG						
E00-903-0__	Thick Wall Tubing	1	BULK	N/A	1	1
E00-903-006	Thick Wall Tubing: One (1) 6" Piece	1	BULK	N/A	1	1
E00-903-008	Thick Wall Tubing: One (1) 8" Piece	1	BULK	N/A	1	1
E00-903-009	Thick Wall Tubing: One (1) 9" Piece	1	BULK	N/A	1	1
E00-903-010	Thick Wall Tubing: One (1) 10" Piece	1	BULK	N/A	1	1
E00-903-012	Thick Wall Tubing: One (1) 12" Piece	1	BULK	N/A	1	1
E00-903-024	Thick Wall Tubing: One (1) 24" Piece	1	BULK	N/A	1	1
E00-903-048	Thick Wall Tubing: One (1) 48" Piece	1	BULK	N/A	1	1
Conductor Size: 2/0 AWG / 350 MCM						
E00-904-0__	Thick Wall Tubing	1	BULK	N/A	1	1
E00-904-006	Thick Wall Tubing: One (1) 6" Piece	1	BULK	N/A	1	1
E00-904-008	Thick Wall Tubing: One (1) 8" Piece	1	BULK	N/A	1	1
E00-904-009	Thick Wall Tubing: One (1) 9" Piece	1	BULK	N/A	1	1
E00-904-012	Thick Wall Tubing: One (1) 12" Piece	1	BULK	N/A	1	1
E00-904-024	Thick Wall Tubing: One (1) 24" Piece	1	BULK	N/A	1	1
E00-904-030	Thick Wall Tubing: One (1) 30" Piece	1	BULK	N/A	1	1
E00-904-048	Thick Wall Tubing: One (1) 48" Piece	1	BULK	N/A	1	1

Splice Kits & Heat Shrink Tubing

Bulk Heat Shrink Tubing

Item Part #	Description	Unit Qty	Unit Pkg	TL Case Qty	Min Order Qty	Bulk Ship Wt (Lbs)
Conductor Size: 250 MCM / 500 MCM						
E00-905-0__	Thick Wall Tubing	1	BULK	N/A	1	1
E00-905-006	Thick Wall Tubing: One (1) 6" Piece	1	BULK	N/A	1	1
E00-905-008	Thick Wall Tubing: One (1) 8" Piece	1	BULK	N/A	1	1
E00-905-009	Thick Wall Tubing: One (1) 9" Piece	1	BULK	N/A	1	1
E00-905-012	Thick Wall Tubing: One (1) 12" Piece	1	BULK	N/A	1	1
E00-905-024	Thick Wall Tubing: One (1) 24" Piece	1	BULK	N/A	1	1
E00-905-048	Thick Wall Tubing: One (1) 48" Piece	1	BULK	N/A	1	1

Refer to the Heat Shrink Tubing Dimensions to select the Heat Shrink Tubing size which will shrink to fit snugly over the component to be covered. If recovery is restricted, the resulting wall thickness will be less than specified.



Heat Shrink Tubing Dimensions

Item Part #	Bulk Item Number	Expanded		Recovered		Wall Thickness (NOM) W		Application Range for General Use		600/1000 V Single Conductor Size
		Internal Diameter (MIN) D		Internal Diameter (MAX) d						
		Inches	MM	Inches	MM	Inches	MM	Inches	MM	AWG/MCM
HST1410	E00-902-0__	0.35	8.9	0.12	3.0	0.07	1.8	.15-.3	3.5-8	#14-#10
HST84	E00-903-0__	0.75	19.1	0.24	6.1	0.12	3.0	.25-.65	6.5-16.5	#6-#2
HST23/0	E00-901-0__	1.10	27.9	0.35	8.9	0.12	3.0	.4-.95	10/24	1/0-3/0
HST2/0300	E00-904-0__	1.50	38.1	0.47	11.9	0.14	3.6	.5-1.4	13-35	2/0-350
HST300650	E00-905-0__	2.0	50.8	0.63	16	0.14	3.6	.70-1.75	17.5-44	250-500

Heat Shrink Tubing Specifications

Physical		Electrical		Chemical		Adhesive	
Tensile Strength	2100 psi (14.5 MPa)	Dielectric Strength	500V/Mil (20kV/mm)	Fluid Resistance	Good to Excellent	Adhesive Softening Point	197°F (92°C) +/- 41°F (5°C)
Specific Gravity	1.1	Volume Resistivity	1016 ohm-cm	Copper Corrosion	No Corrosion	Adhesive Lap Shear	125 psi (0.875 MPa)
Heat Shock (4 hrs at 437°F (225°C))	No cracking or flowing	Dielectric Voltage Withstand (2500 V, 60 Hz, 1 min)	No breakdown, 24kV-1 min, 15kV-4 hrs	Water Absorption	0.1%	Adhesive Blocking (86°F (30°C))	No blocking
Low Temperature Flexibility (4 hrs at -67°F (-55°C))	No cracking			Fungus Resistance	No Growth	Water Penetration	No penetration after 236 hrs (min) of continuous immersion

Other Products / Accessories

Duct Seal Compound

- Use to seal around junction boxes, flashings, service mast, and cable entries. Excellent adhesive properties for use on wood, glass, aluminum, and steel.
- Asbestos-free, odorless, non-sticky formula can be painted immediately.
- Temperature tolerance: -40 °F (-40 °C) to 180 °F (82 °C).



Duct Seal Compound

**Part Number:
EPD1**

Item Part #	Description	Unit Qty	Case Qty	Min Order Qty	Ship Wt (Lbs)
EPD1	Duct Seal: 1 lb. BRICK	1	50	1 Lbs	1
EPD5	Duct Seal: Package of Five (5) 1 lb. BRICKS	1	10	5 Lbs	5
EPD5B	Duct Seal: 5 lb. BRICK (BULK)	1	10	5 Lbs	5

Quick References

Use these QR Codes to gain quick access to our website and YouTube channel.



EPCO Website: www.engproducts.com



Fixture Whip Part Number Generator



**EPCO YouTube Channel:
Product and Installation Videos**

Questions?

Call 800.336.1976

Email sales@engproducts.com

Or Visit engproducts.com

Part Number Index

Item Part #	Page	Item Part #	Page	Item Part #	Page	Item Part #	Page
10003	7	15906	33 29	20297	7	LLPN25B	34 35
10004	6	15913	26 28	ACWNM1043-1RA	17	LSPB	34 35
10008	6	15915	26 28	ACWNM1063-1RA	17	LSPB-RECEP	34 35
10009	7	15922B	27 31	ACWNM843-1RA	17	MCWA-12/2SOL-8	16
10010	7	15922S	27 31	ACWNM863-1RA	17	MCWA-12/2SOL-10	16
10011	7	15973	27 30	ACWNM843-1RA-1/2	17	MCWA-12/2SOL-12	16
10016	7	15975	27 30	ACWNM863-1RA-1/2	17	MCWA-12/2SOL-15	16
10019	6	15980	27 31	ACWNMD1043-1RA	17	MCWA-12/2SOL-20	16
10020	6	15980B	27 31	ACWNMD1063-1RA	17	PEWNM1263-1RA	17
10025	6	15981	27 30	ACWNMD843-1RA	17	PEWNM1243-1RA	17
10026	6	15981B	27 30	ACWNM863-1RA	17	PEWNM1264-1RA	17
10029	6	15982	26 28	BSK1	38	PEWNM1244-1RA	17
10035	6	15982B	26 28	BSK2	38	TAP-OFF BOXES	3
10036	6	16022	25	BSK3	38	UFC2B	36
10041	6	16023	25	BSK4	38	UFS2	36
10061	9	16024	25	DRBSK	37		
10062	9	16025	25	DRBSK1	37		
10065	9	16100	25 33	DRBSK3	37		
10077	9	16104	24	E00-901-005	40		
10086	7	16110	25	E00-901-006	40		
10087	7	16140	23	E00-901-008	40		
10088	7	16143	23	E00-901-909	40		
10089	7	16145	23	E00-901-010	40		
10960	5 18-19-	16400	24	E00-901-012	40		
10960-LID	5 19	16410	24	E00-901-024	40		
10961	5 20	16420	24	E00-901-036	40		
10962	5 20	16425	24	E00-901-048	40		
10963	19	16453	24	E00-902-006	40		
10964	19	16454	24	E00-902-008	40		
116-800-015	5	16500	33	E00-902-009	40		
116-800-050	5	16501	33	E00-902-012	40		
116-800-022	5	16502	33	E00-902-024	40		
15000	26 29	16514	33	E00-902-048	40		
15000B	26 29	16520	33	E00-903-006	40		
15015	27 33	17230	35	E00-903-008	40		
15045	27 32	20203	7	E00-903-009	40		
15046	32	20204	6	E00-903-010	40		
15047	32	20208	6	E00-903-012	40		
15050	30	20209	7	E00-903-024	40		
15050B	30	20210	7	E00-903-048	40		
15090	33	20211	7	E00-904-006	40		
15245	27 32	20216	7	E00-904-008	40		
15246	27 32	20219	6	E00-904-009	40		
15247	27 32	20220	6	E00-904-012	40		
15248	27 32	20225	6	E00-904-024	40		
15258	27 32	20226	6	E00-904-030	40		
15721	23	20229	6	E00-904-048	40		
15721-10K5	23	20235	6	E00-905-006	41		
15721-10K5-PC6	23	20236	6	E00-905-008	41		
15722	21	20241	6	E00-905-009	41		
15723	21	20251	10	E00-905-012	41		
15738	4 21	20251T	10	E00-905-024	41		
15739	4 21	20252	10	E00-905-048	41		
15742	4 22	20253	10	E04-002-004	35		
15742-12A1-P1R1	22	20253T	10	EGBP-06-12-00-00	2 11		
15742-12A1-P6R1	22	20261	9	EGBP-06-24-00-00	2 11		
15742-12A1-P25R1	22	20262	9	EGBP-06-36-00-00	2 11		
15742-12A1-P35R1	22	20265	9	EGBP-06-72-00-5	2 11		
15743	4 22	20267	8	EGBP-06-120-00-5	2 11		
15743-12A1-P1R1	22	20268	8	EPD1	42		
15743-12A1-P6R1	22	20270	8	EPD5	42		
15743-12A1-P25R1	22	20274	8	EPD5B	42		
15743-12A1-P35R1	22	20275	8	HST-T1	39 41		
15748	21	20277	9	HST1410	39 41		
15800	26 29	20286	7	HST2/0300	39 41		
15800B	26 29	20287	7	HST23/0	39 41		
15815	33 29	20288	7	HST300650	39 41		
15905	33 29	20289	7	HST84	39 41		

WARRANTY

Unless otherwise noted, Engineered Products Company (herein known as EPCO) warrants that the products described herein, will be furnished free from defects in material and workmanship for one (1) year. Any exceptions to this Warranty Statement will be detailed within the respective warranty section in this product catalog, noted on the product itself, or the product packaging.

EPCO's sole obligation for any breach of warranty under the terms herein shall be, at our option, to repair or provide replacement for the Product to which such warranty is breached, or to return all payments made with respect to such product. Any product(s) that are deemed to be defective must be specified by the Purchaser in a written notice to EPCO's Warranty Department within one (1) year after receipt of such goods. Under no circumstances will EPCO be liable for loss of profits or incidental, indirect, consequential or special damages of any kind beyond the replacement cost of the defective merchandise.

EPCO shall not be liable for any losses arising from governmental action, an act of God, or the result of war, riot, strikes, civil commotion, sovereign conduct, or the act or conduct of any person or persons not party to or associated with EPCO.

LED LUMINAIRE PRODUCTS LIMITED WARRANTY

Engineered Products Company (herein known as EPCO) warrants at its sole option, after a failure is confirmed as a true defect in materials or workmanship, EPCO will replace or refund, any of the following LED Luminaire Products for a period of five (5) years from original purchase. This warranty statement applies to the original purchaser and is not transferable. The Original Purchaser is identified as the first initial installation completed by the Building Owner. If the product fails before the 5-year period expires, please return this product with your original invoice to: Engineered Products Company, Attention: Return Materials Department, 5401 Smetana Drive, Minnetonka, Minnesota 55343.

This Limited Warranty applies to the following products: LED Strips; LED RetroFit Conversion Kits for Strip-Type Fixtures; TIGER XL Fixtures; TIGRESS Prefab Temporary LED Luminaires, TIGERcub 100-Watt and 150-Watt Temporary LED Luminaires; ProSeries LED Luminaire and LED Upgrade; ProSeries Elite Ceiling/Pendant and Wall Mount LED Utility Luminaire; 9-Watt LED Luminaire (3-Year Warranty); ProSeries "Junior" LED Utility Lamp, Lamp Upgrade, and Utility Luminaire (3-Year Warranty); Motion Sensing LED Closet Luminaire; and Color Select Small Space LED Luminaire with Motion Sensor and Small Space Luminaire with Motion Sensor.

This Limited Warranty does not apply to any of the following:

- Disassembly of LED Driver, LED Strip, or Luminaire Housing by the end-user or the end-user's agent.
- Severe damage or deformation to the appearance of the LED Driver, LED Strip, or Luminaire.
- Damage to the LED Driver or LED Strip input (+) or output (-) conductors.
- LED Driver or Luminaire identification codes and/or other serial numbers that have been erased, altered, modified, or damaged.
- Damage to the LED Driver, LED Strip, or Luminaire caused by natural disasters.
- Must be installed per installation instructions and local building code.
- Any Luminaire, Luminaire Housing, or LED RetroFit Conversion Kit that was incorrectly installed by drilling holes, puncturing, piercing or any other means that will alter the product's integrity.
- Damage caused by the use of parts, components, and/or other equipment(s) that is not compatible, suitable, or unauthorized by EPCO for use with any Luminaire or LED RetroFit Conversion Kit.
- Damage resulting from the use of any Luminaire or LED RetroFit Conversion Kit in what EPCO, at its sole discretion, considers extreme applications.
- Product damage as determined by EPCO to be caused by a crash, impact, or obvious signs of abuse to any Luminaire or LED RetroFit Conversion Kit.
- For Fluorescent Luminaires only, the Ballast Warranty is limited to the first initial installation completed by the Building Owner. Contact the ballast manufacturer directly for more specific information on their warranty policy and procedures.
- The Chemical Resistance of Plastics Chart (posted on EPCO's website) provides an overview of those chemical compounds where these luminaires should not be installed.
- There are no charge-backs for any type of labor allowance required to remove, re-install, or re-power any Luminaire or LED RetroFit Conversion Kit and/or the replacement with a new luminaire or kit.

Units of Measure:

Unit Qty: Number of pieces in each unit
Unit Pkg: Unit packages contained in the case
Case Qty: The total number of items in each master case
Min Order Qty: The smallest unit that can be ordered
Ship Wt (Lbs): The total weight of the units per Case

General Statements:

Specifications subject to change without prior notice. PigTails, PowerTails, QuickWhips, ProSeries, Landscape LightPost, SplicePost, and Receptacle SplicePost, Temp Power Block, TIGRESS, TIGRESS Prefab, TIGER XL, TIGERcub, SPIDERBOX and CordLights are either trademarks or registered trademarks for Engineered Products Company in the United States and/or in other countries. All other trademarks are the property of their respective holders. EPCO products are designed, manufactured, and independently verified to meet the most recent safety and performance requirements of Underwriters Laboratory (UL). Installation of EPCO products should be in accordance with the 2026 Edition of the National Electrical Code (NEC) and all applicable local electrical codes and regulations.

Icon Legend:





©2026 EPCO | Engineered Products Company. All Rights Reserved.

PigTails, PowerTails, QuickWhips, ProSeries, Landscape LightPost, SplicePost and Receptacle SplicePost, Temp Power Block, TIGER, TIGRESS, TIGER XL, SPIDERBOX and CordLights are either trademarks or registered trademarks for Engineered Products Company in the United States and/or in other countries. All other trademarks are the property of their respective holders.

E02-001-000-L2 (1/26 MB)