

COMMERCIAL ACCESSORIES

DUCT SEAL COMPOUND

EPCO Duct Seal Compound is used to seal around junction boxes, flashings, service mast and cable entries. Duct Seal Compound is available in individual 1 lb. bricks, five (5) 1 lb. bricks in one package, or a 5 lb. brick. Each Duct Seal package is individually wrapped in release paper to simplify handling and repackaging.

- Asbestos-free compound
- Can be painted immediately.
- Excellent adhesive properties for use on wood, glass, aluminum and steel.
- Meets the requirements of the 2017 National Electrical Code: Articles 230.8 and 300.5(D)(2).
- Odorless, non-sticky.
- Temperature tolerance: -40°C (-40°F) to 82°C (180°F).

Note: None of the components of this product are hazardous as defined by OSHA Hazard Communication Standard (29 CFR 1910.1200). For more information, visit our website at engproducts.com/Resources to view the Duct Seal MSDS Sheet.



EPCO UV Duct Seal Compound is Made in the USA. Complies with the American Recovery and Reinvestment Act – Buy American Provision.

Catalog Number	UPC Number	Description	Order Unit	Unit Qty	Unit Pkg	Units/Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
EPD1	10101	Duct Seal: 1 Lb. Slug	LB	50	BX	1	1	1	No	50
EPD5	10102	Duct Seal: Package of 5 - 1 Lb. Slugs	LB	50	BX	5	5	5	Yes	50
EPD5B	10105	Duct Seal: 5 Lb. Brick	LB	50	BX	1	1	1	No	50

TIE WIRE

Supports a variety of uses on the job site including bundling, supporting and hanging cable conduit and suspended luminaires. Available in 16 AWG Black Annealed or Galvanized rolls. Also available in 18 AWG Galvanized 30" pre-cut lengths.

Tie Wire: 18 AWG Galvanized Straight Wire

Carbon: C1008 Soft Annealed

Yield: LB/FT = .0104 (104 feet per pound)

Size: .047" Diameter (plus/minus .001")

Tensile/Breaking Strength: 75 lb. max. PSI; 105-135 lbs.

ASTM: Zinc Coating; Meets A641 that requires no minimum ounces of zinc per square foot of surface area.

Federal Specification: QQ-W-461

Tie Wire: 16 AWG Black and Galvanized Coiled Wire

Carbon: C1008 Soft Annealed

Yield: LB/FT = .0104 (104 feet per pound)

Size: .0625" Diameter (plus/minus .001")

Tensile/Breaking Strength: 45-60,000 PSI

ASTM: Zinc Coating; Meets A641 that requires no minimum ounces of zinc per square foot of surface area.


Federal Specification: QQ-W-461



Catalog Number	UPC Number	Description	Order Unit	Unit Qty	Unit Pkg	Units/Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
TY16	10150	16 AWG Black Tie Wire: 350' per Roll	EA	20	BX	20	20	20	Yes	70
TY16G	10152	16 AWG Galvanized Tie Wire: 350' per Roll	EA	20	BX	20	20	20	Yes	70
TY18G	10151	18 AWG Galvanized Tie Wire: 30" Length	EA	1750	BX	1750	1750	1750	Yes	25
TY18G-50B	12000	18 AWG Galvanized Tie Wire: 30" Length, 50 per Bundle	EA	35	BX	35	35	1	No	25

LUMINAIRE HANGERS

These labor saving Luminaire Hangers are available in Side Mount or Top Mount styles and can be used with our Chain and S-Hook products. Top Mount Hangers are used when the mounting holes are located on top of a troffer type luminaire. Side Mount Hangers are used when the mounting holes are located on the side of a troffer type luminaire. Both Luminaire Hanger styles are plated for durability and precisely bent to simplify installation and ensure a secure fit.

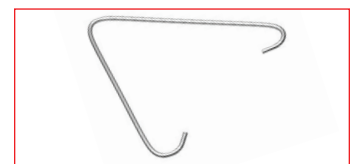

EPCO Luminaire Hangers are Made in the USA. Complies with the American Recovery and Reinvestment Act – Buy American Provision.

Catalog Number	UPC Number	Description	Order Unit	Unit Qty	Unit Pkg	Units/Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
SMH	10726	11 AWG Plated Luminaire Hangers: Side Mount	EA	100	BX	100	100	100	Yes	5
TMH	10725	10 AWG Plated Luminaire Hangers: Top Mount	EA	100	BX	100	100	100	Yes	7

Specifications subject to change without prior notice.

www.engproducts.com

5401 SMETANA DRIVE | MINNETONKA, MN 55343

P 800.336.1976 | F 800.336.2801



ENGINEERED PRODUCTS CO.

SINGLE LOOP JACK CHAIN

Single Loop Jack Chain is used to support suspended luminaires and is often required by code in many cities. We package the chain in convenient 50 and 100-foot boxes.

Single Loop Jack Chain



SINGLE LOOP JACK CHAIN LOAD LIMITS

Trade Size	Wire Gauge	Wire Diameter (Inches)	Length Per 100 Link (Inches)	Weight Per 100-Foot (Pounds)	Working Load Limit (Pounds)	Break Test Load (Pounds)
12	13	.105	75	8.5	29 Lbs	115 Lbs
10	12	.135	95	14.7	43 Lbs	170 Lbs

Catalog Number	UPC Number	Description	Order Unit	Unit Qty	Unit Pkg	Units/Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
Single Loop Jack Chain										
JC10B/100B	10201	10 AWG Bright Jack Chain: 100-FT per Carton	FT	100	BX	5	500	100	Yes	80
JC12B/100	11703	12 AWG Bright Jack Chain: 100-FT Spool	FT	100	BX	5	500	100	Yes	45
JC12B/100B	10203	12 AWG Bright Jack Chain: 100-FT per Carton	FT	100	BX	5	500	100	Yes	45

 EPCO Loop Chain is Made in the USA. Complies with the American Recovery and Reinvestment Act – Buy American Provision.

S-HOOKS

S-Hooks are used with Jack Chain to support suspended luminaires. All S-Hooks are plated for lasting durability. Two sizes are available ranging from 1.125" length 12 AWG wire to 1.25" length 10 AWG wire.



S-HOOK LOAD LIMITS

Trade Size	Wire Gauge	Wire Diameter (Inches)	Length (Inches)	Working Load Limit (Pounds)	Minimum Strength (Pounds)
SH10	10	.135	1.25	48 Lbs	190 Lbs
SH12	12	.105	1.125	32 Lbs	97 Lbs

Catalog Number	UPC Number	Description	Order Unit	Unit Qty	Unit Pkg	Units/Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
SH10	10251	10 AWG Plated S-Hooks: 1.25" Length	EA	100	BG	10	1000	100	Yes	11
SH12	10252	12 AWG Plated S-Hooks: 1.125" Length	EA	100	BG	10	1000	100	Yes	10

 EPCO S-Hooks are Made in the USA. Complies with the American Recovery and Reinvestment Act – Buy American Provision.

UNITS OF MEASURE KEY

Order Unit: The Unit to be ordered; **Order Qty:** Number of pieces in each Unit; **Unit Pkg:** Packaging types - BG (Bag), BX (Box), BN (Bulk); **Units/Case:** Unit packages contained in the Case; **TL Case Qty:** The total number of items in each Master Case; **Min Order Qty:** The smallest Unit that can be ordered; **MM Req:** Must order multiples of the Unit in the stated quantities; **Ship Wt (Lbs):** Total weight of the Units per Carton

Specifications subject to change without prior notice.

C1 (4/18-SP)
©2018 Engineered Products Company. All Rights Reserved.

www.engproducts.com

5401 SMETANA DRIVE | MINNETONKA, MN 55343
P 800.336.1976 | F 800.336.2801

